
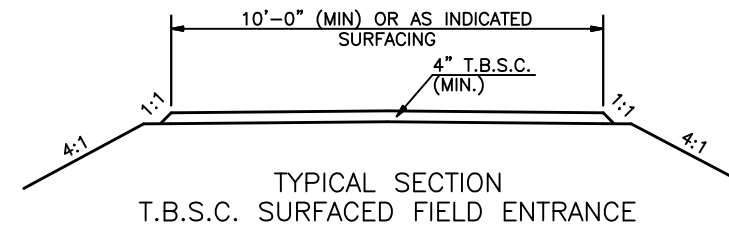
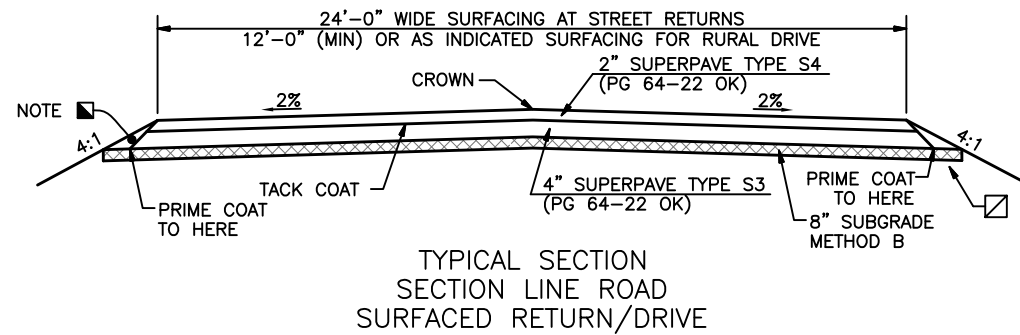
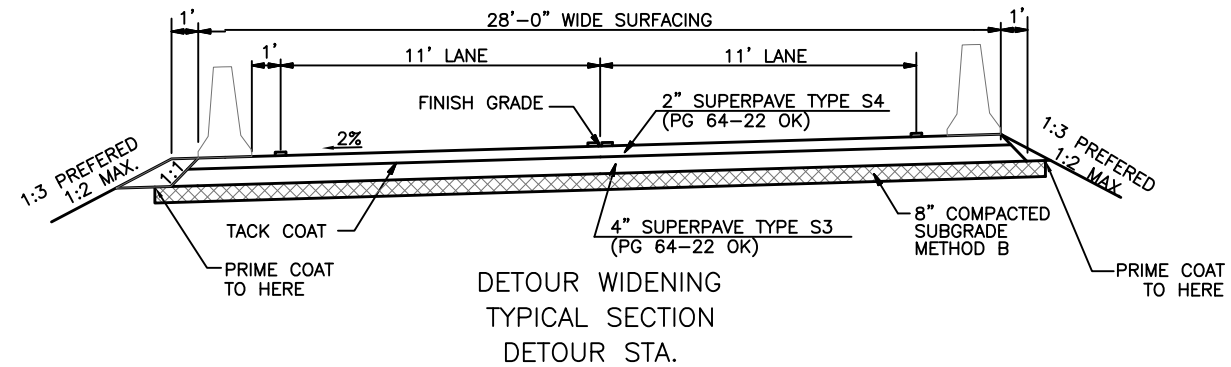


- ☑ 8" STABILIZED SUBGRADE. AN UNDERCUT DEPTH OF 12" WILL BE REQUIRED AT LOCATIONS AS DIRECTED BY ENGINEER. PROOF ROLLING WILL BE REQUIRED TO LOCATE SOFT SPOTS IN THE SUBGRADE PRIOR TO SUBGRADE STABILIZATION.
- THIS AREA TO BE BACKFILLED AND COMPACTED WITH T.B.S.C. TYPE "E" AS PART OF THE FINISHING OPERATIONS. COST OF SHOULDERING OPERATION WILL BE INCLUDED IN OTHER ITEMS OF WORK.

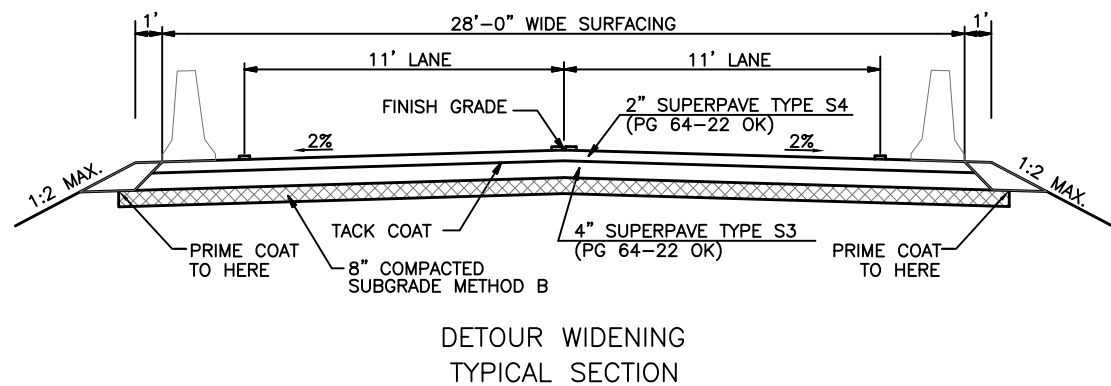

Design	
Drawn	
Checked	
Approved	
Squad	GUERNEY

TYPICAL SECTIONS