


ODOT DIVISION	STATE	J/P PROJ NO	FISCAL YEAR	SHEET NO	TOTAL SHEETS
8	OKLA	27092(04)		83	143

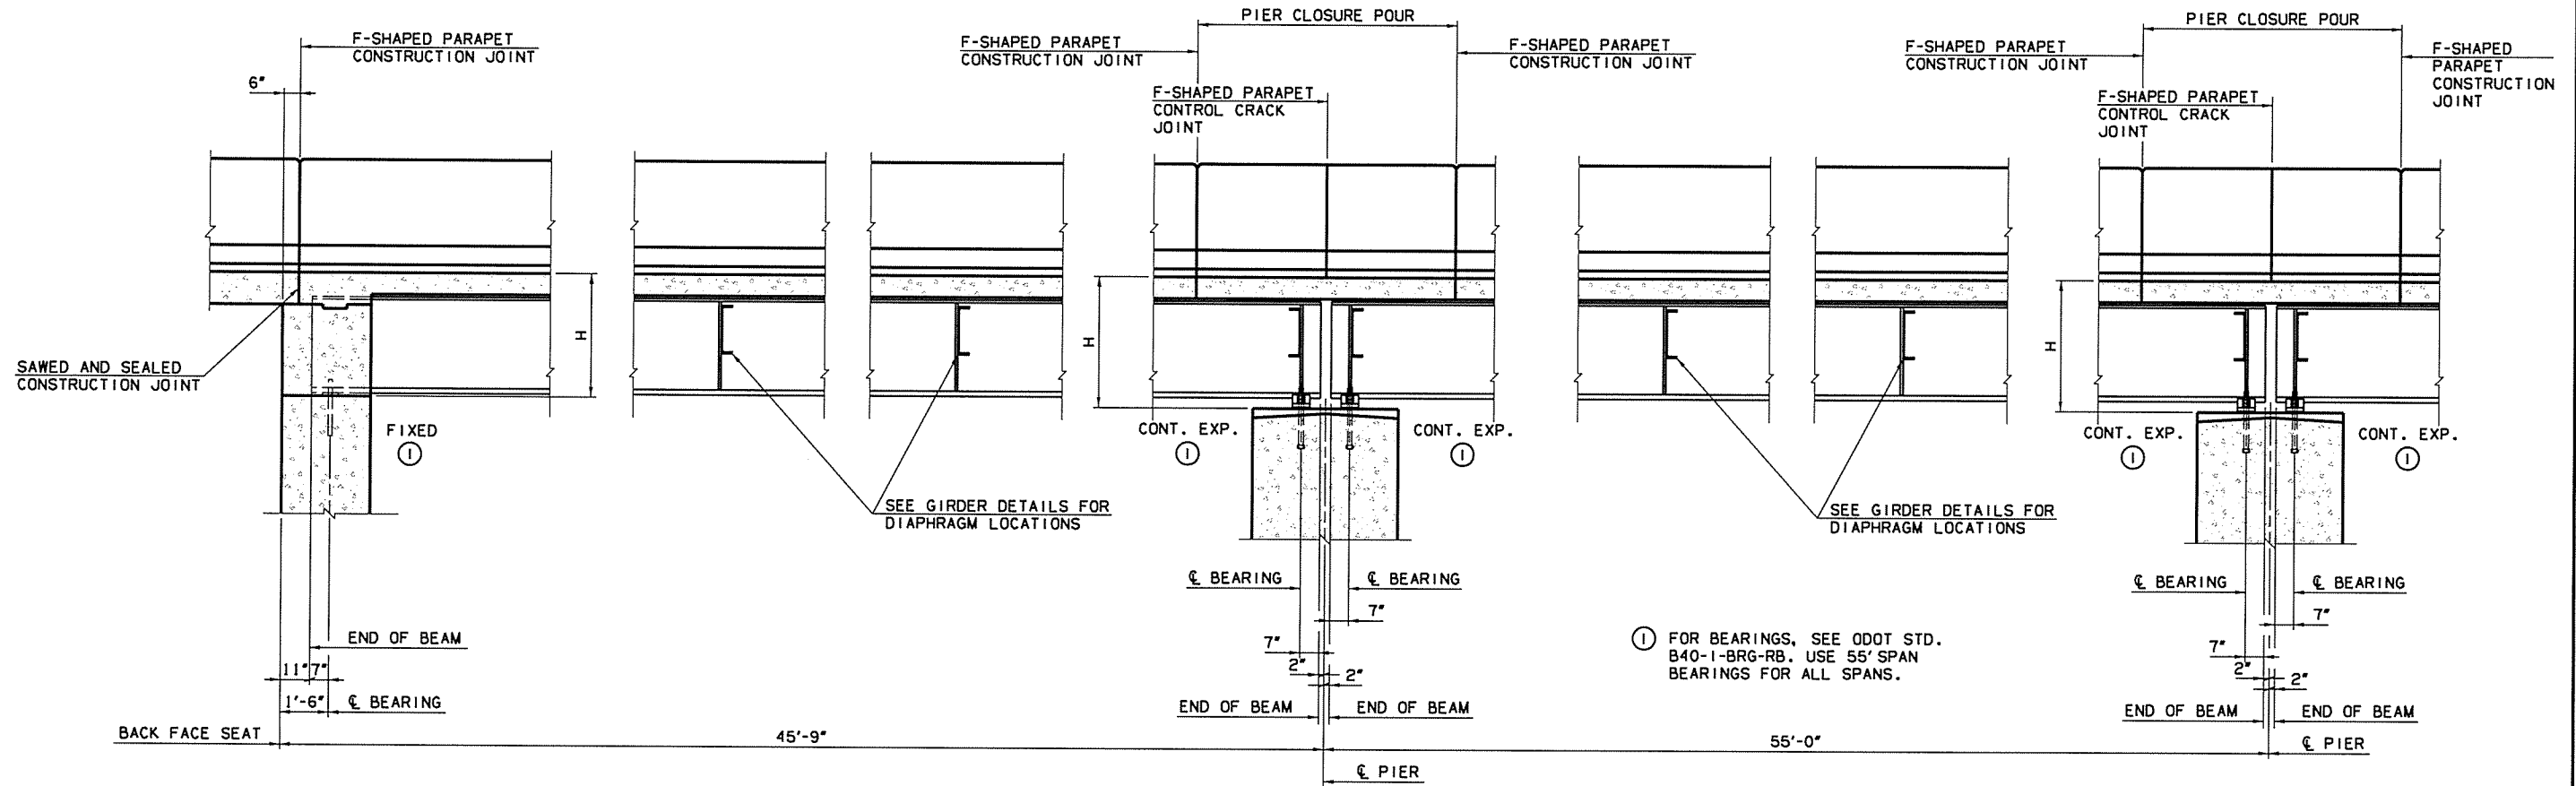

① FOR BEARINGS, SEE ODOT STD. B40-1-BRG-RB. USE 55' SPAN BEARINGS FOR ALL SPANS.

ABUTMENT

INTERMEDIATE DIAPHRAGMS

FIXED PIER WITH STANDARD CAP

INTERMEDIATE DIAPHRAGMS

FIXED PIER WITH STANDARD CAP

LONGITUDINAL SECTION

SCALE: 3/8" = 1'-0"

LOCATION	H
ABUTMENT NO. 1	3'-8 3/4"
PIER NO. 1	4'-0 7/8"
PIER NO. 2	4'-0 7/8"
ABUTMENT NO. 2	3'-8 3/4"

INSTALL ALL DIAPHRAGMS AND TIGHTEN ALL BOLTS BEFORE PLACING CONCRETE FOR THE DECK SLAB OR APPLYING OTHER MASSIVE LOADS TO THE BEAMS.

NOTES:
 1. H DIMENSION IS FROM TOP OF DECK SLAB TO BOTTOM OF BEARING ASSEMBLY AT CL BEARING.

Design	SF	6/16	US 169 OVER OPOSSUM CREEK OVER FLOW NOWATA COUNTY BRIDGE B
Drawn	WZB	6/16	
Checked	DAS	6/16	
Approved	SAK	6/16	
Squad	BENHAM		

LONGITUDINAL SECTION

Job Piece No. 27092(04) Sheet No. 83