


FOOT DIVISION	STATE	J/P PROJ NO	FISCAL YEAR	SHEET NO	TOTAL SHEETS
8	OKLA	27092(04)		85	143

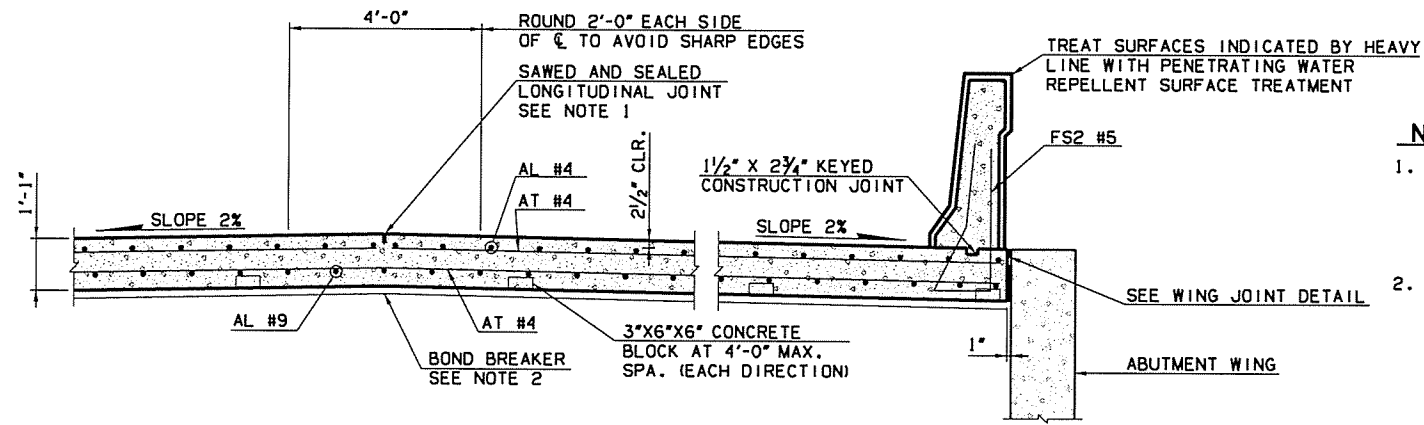


NOTES:

1. PLACE REINFORCING IN THE TOP OF THE APPROACH SLAB 2" FROM EITHER SIDE OF SAWED AND SEALED LONGITUDINAL JOINT. FOR ADDITIONAL DETAILS OF LONGITUDINAL JOINT, SEE STD. LECS-4.
2. BOND BREAKER SHALL BE ONE 6 MIL OR TWO 4 MIL POLYETHYLENE SHEETS. BOND BREAKER SHALL EXTEND FULL WIDTH OF APPROACH SLAB AND FULL LENGTH UP TO THE BACK FACE OF THE ABUTMENT DIAPHRAGM. BOND BREAKER SHALL NOT BE PLACED IN NOTCH OF THE ABUTMENT DIAPHRAGM.
3. FOR ADDITIONAL DETAIL OF 42" F-SHAPED CONCRETE PARAPET, SEE STD. FSHP-42-2.

APPROACH SLAB BAR LIST (ONE SHOWN, TWO REQUIRED)					
EPOXY COATED REINFORCING					
MARK	SIZE	QTY.	FORM	LENGTH	REMARKS
AT1	#4	42	STR.	23'-2"	
AT2	#4	21	STR.	46'-8"	
AL1	#4	48	STR.	19'-8"	
AL2	#9	71	STR.	19'-8"	
FS2	#5	42	BNT.	7'-4"	NOTE 1

NOTES:

1. FOR FS2 #5 BEND DETAIL SEE STD. FSHP-42-2

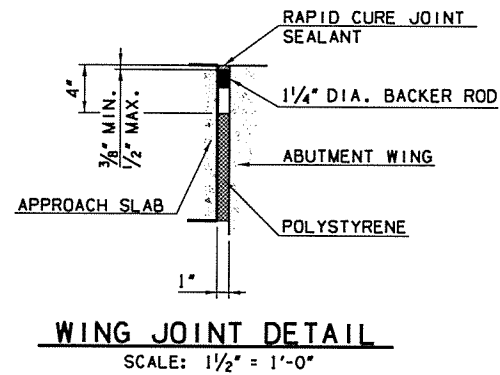

Design	STF	6/16	US 169 OVER OPOSSUM CREEK OVER FLOW NOWATA COUNTY BRIDGE B APPROACH SLAB DETAILS (SHEET 2 OF 2) Job Piece No. 27092(04) Sheet No. 85
Drawn	WZB	6/16	
Checked	DAS	6/16	
Approved	SAK	6/16	
Squad	BENHAM		