


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
6	OKLA.				

DESCRIPTION	REVISIONS	DATE

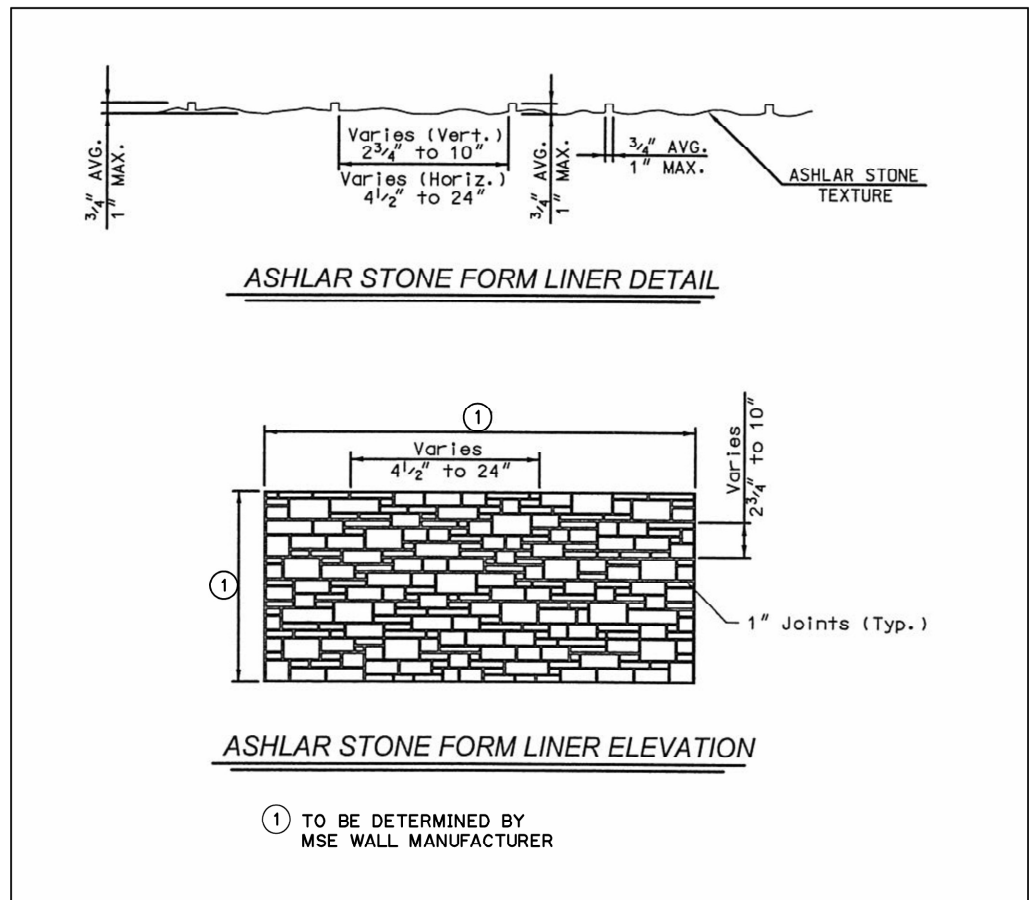

**SPECIAL FINISH NOTES:**

1. CONCRETE SURFACES OF MSE WALLS SHALL HAVE A TEXTURED APPEARANCE AS INDICATED ON THE PLANS.
2. THE TEXTURED SURFACES SHALL HAVE A MINIMUM 3/4" AND MAXIMUM 1" VERTICAL RELIEF, "ASHLAR STONE" APPEARANCE AS PRODUCED BY USING FORM LINERS MANUFACTURED BY SYMONS CORPORATION, ARCHITECTURAL POLYMERS OR AN APPROVED EQUAL.

**CONCRETE FINISHING:**

1. THE MSE WALL SHALL RECEIVE A FINISH IN ACCORDANCE WITH SUBSECTIONS 509.04.G(7) CLASS 7 AND 737.02 OPTION II OF THE STANDARD SPECIFICATIONS.
2. THE COLOR OF ALL EXPOSED SURFACES OF THE MSE WALL SHALL BE TAN CONFORMING TO FEDERAL COLOR STANDARD NO. 33531.
3. A SAMPLE PANEL, 12"x18", SHALL BE PREPARED WITH THE COLOR FINISH AND SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL BEFORE THE FINAL MIXING OF THE FINISH MATERIAL. THE APPROVAL PANELS WILL BE USED AS A STANDARD FOR APPLICATION THROUGHOUT THE MSE WALL.
4. CONCRETE SURFACE FINISH SHALL NOT BE MEASURED FOR PAYMENT, BUT SHALL BE INCLUDED IN THE PRICE BID FOR SQUARE YARDS OF MSE WALL. THE COLORS IDENTIFIED ABOVE MAY BE REVISED AT NO ADDITIONAL COST TO THE OWNER.

PUSHMATAHA COUNTY

Design	
Drawn	
Checked	
Approved	
Squad	POE

**MSE WALL 'A' DETAILS  
ARCHITECTURAL FINISH**

State Job No. 26346(04) Sheet No. 34