

REY, NO. DESCRIPTION REVISIONS DATE

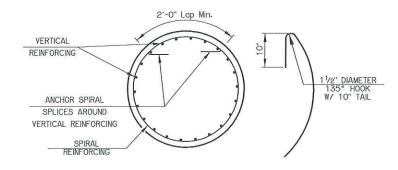

SPIRAL REINFORCING SPLICE DETAIL

NOTE: SPIRAL BAR LENGTH QUANTITY DOES NOT INCLUDE LAP. IF LAP IS REQUIRED, THE LENGTH OF THE LAP SHALL BE AS SHOWN.

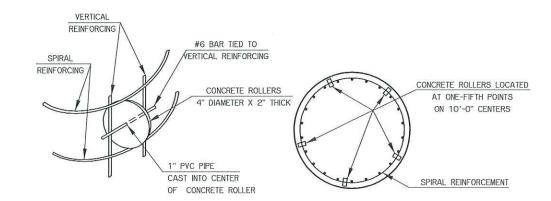


ROLLER INSTALLATION

ROLLER PLACEMENT

DETAIL OF CONCRETE ROLLERS

NOTE: CONCRETE USED IN THE CONCRETE ROLLERS SHALL HAVE A
MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 4,000 P.S.I.
SLAB BOLSTERS, HIGH CHAIRS, AND PLASTIC ROLLERS SHALL NOT
BE SUBSTITUTED FOR THE CONCRETE ROLLERS.

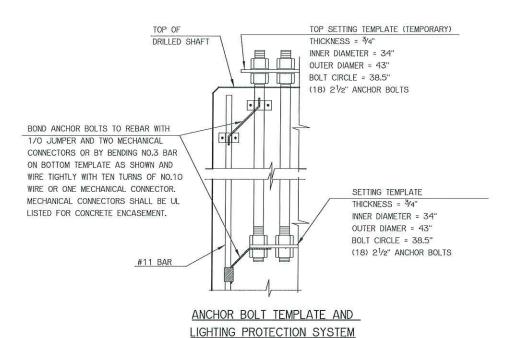

MONOTUBE STRUCTURE (DRILLED SHAFT DETAILS) (SHEET 3 OF 3) Detail JG JW
Check JG JW
Squat SUPERVISOR
Engr. ENGINEER

STATE OF DEPARTMENT OF TRANSPORTATION OKLAHOMA 38 PECE NO. 32625(04) SHETIND. M7