


| REVISIONS | | |
|-----------|-------------|------|
| NO. | DESCRIPTION | DATE |
| | | |

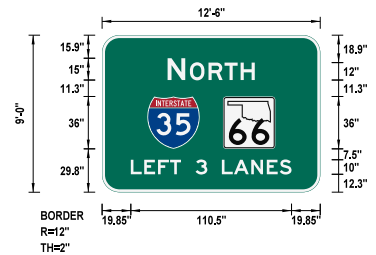


| | |
|------------------|----------------------------------|
| SPECIAL SIGN NO. | 126 |
| WIDTH x HGT. | 12'-6" x 9'-0" |
| BORDER WIDTH | 2" |
| CORNER RADIUS | 12" |
| MOUNTING | Overhead |
| SIGN AREA | 112.5 Sq.Ft. |
| BACKGROUND | TYPE: Reflective COLOR: Green |
| LEGEND/BORDER | TYPE: Reflective COLOR: White |
| SYMBOL | X Y WID HT |
| M1_1 | 31.1 29.8 36 36 |
| M1_6E2 | 83.1 29.9 36 36 |

Dimensions are in: Inches,tenths

Letter locations are panel edge to lower left corner

| LETTER POSITIONS (X) | | | | | | | | | | | | LENGTH | SERIES / SIZE |
|----------------------|------|------|------|------|------|------|------|------|-------|-------|-------|--------|---------------|
| N | O | R | T | H | | | | | | | | 59.9 | E 2000 |
| 45 | 60.3 | 73.2 | 84.2 | 95.3 | | | | | | | | | |
| L | E | F | T | 3 | L | A | N | E | S | | | 110.5 | E 2000 |
| 19.8 | 29 | 38.5 | 46.8 | 54.3 | 64.3 | 72.4 | 82.4 | 90.7 | 102.6 | 113.3 | 122.2 | | |

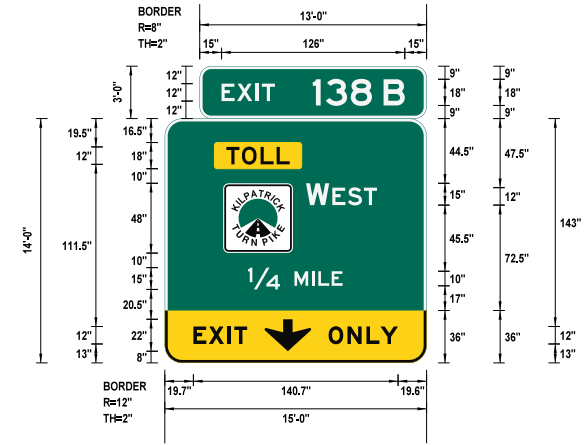

| | |
|------------------|--|
| SPECIAL SIGN NO. | 127 |
| WIDTH x HGT. | 15'-0" x 14'-0" |
| BORDER WIDTH | 2" |
| CORNER RADIUS | 12" |
| MOUNTING | Overhead |
| SIGN AREA | 249.0 Sq.Ft. |
| BACKGROUND | TYPE: Reflective COLOR: Green |
| LEGEND/BORDER | TYPE: Reflective COLOR: Black/White |
| SYMBOL | X Y WID HT |
| Kilpatrick tpk | 40.1 75.5 48 48 |
| ARROW | 68.6 8 32 22 |

Dimensions are in: Inches,tenths

Letter locations are panel edge to lower left corner

| LETTER POSITIONS (X) | | | | | | | | | | | | LENGTH | SERIES / SIZE |
|----------------------|-------|-------|-------|-------|--|--|--|--|--|--|--|--------|---------------|
| E | X | I | T | | | | | | | | | 36.7 | E 2000 |
| 15 | 25.7 | 38.5 | 42.7 | | | | | | | | | | |
| 1 | 3 | 8 | | | | | | | | | | 40.7 | E 2000 |
| 77.8 | 86.8 | 103.9 | | | | | | | | | | | |
| B | | | | | | | | | | | | 14.6 | E 2000 |
| 126.4 | | | | | | | | | | | | | |
| T | O | L | L | | | | | | | | | 43.6 | E 2000 |
| 42.3 | 53 | 65.8 | 76.9 | | | | | | | | | | |
| W | E | S | T | | | | | | | | | 48.8 | E 2000 |
| 97.1 | 115.2 | 125.9 | 136.9 | | | | | | | | | | |
| 1/4 | M | I | L | E | | | | | | | | 65.1 | E 2000 |
| 57.2 | 89.2 | 101.2 | 105.6 | 114.8 | | | | | | | | | |
| E | X | I | T | | | | | | | | | 37 | EM 2000 |
| 19.7 | 30.2 | 43.2 | 47.7 | | | | | | | | | | |
| O | N | L | Y | | | | | | | | | 47.8 | EM 2000 |
| 112.6 | 125.6 | 138.7 | 148.3 | | | | | | | | | | |

G:\09\Projects\1-2598 I-35 Signing Project - EC-888B.Task \VCAD\T035-32625(04)-SIGN DETAIL.S.dgn 09/14/17

| | | |
|--------|-----|----------|
| Design | SDH | 09/14/17 |
| Drawn | CCC | 09/14/17 |

SPECIAL SIGN DETAILS
(29 OF 71)