



SIGNS 6 & 7 DETAIL
NOT TO SCALE

NOTE: USE "ClearviewHwy-4-W" FONT FOR SIGNS 6 & 7.

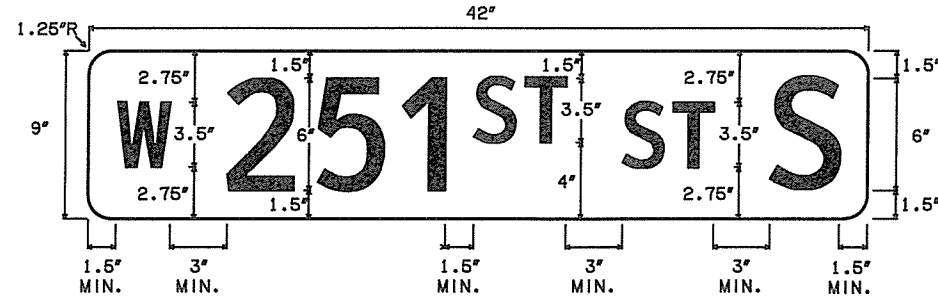

SIGN 13 DETAIL
NOT TO SCALE

FLUSH WITH TOP OF POST AND SIGN

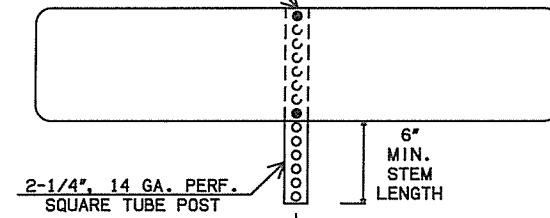

SIGN 13 INSERT DETAIL
NOT TO SCALE

2-1/2", 14 GA. PERF. SQUARE TUBE POST

- NOTE: 1) D3-1 SIGNS SHALL NOT BE ATTACHED DIRECTLY TO 2-1/2" POST.
2) HAMMER BEND ALL BOLTS AFTER INSTALLATION TO PREVENT UNAUTHORIZED REMOVAL OF SIGNS AND INSERT.

SIGN SUMMARY

SIGN NO.	ALIGNMENT	APPROXIMATE C.R.L. STATION LOCATION	SIGN TYPE	SIGN THICKNESS			POSTS		(PL) REMOVAL OF EXISTING SIGNS	REMARKS
				0.063"	0.080"	0.100"	14 GA.			
				SHEET ALUMINUM SIGNS			2-1/4" SQUARE TUBE POST	2-1/2" SQUARE TUBE POST		
			(STD.)	(S.F.)	(S.F.)	(S.F.)	(L.F.)	(L.F.)	(EA.)	
1	PROP. SH-16	STA 133+30	W1-2R	-	6.25	-	-	13	-	INSTALL NEW SIGN (CURVE RIGHT)
2	EX SH-16	STA 121+30	W1-2R	-	6.25	-	-	-	1	REMOVE (CURVE RIGHT)
3	PROP. SH-16	STA 125+00	W1-2R	-	6.25	-	-	13	-	INSTALL NEW SIGN (CURVE RIGHT)
4	EX SH-16	STA 124+10	W1-2R	-	6.25	-	-	-	1	REMOVE (CURVE RIGHT)
5	EX SH-16	STA 127+00	W8-13	-	-	9	-	-	1	REMOVE (BRIDGE ICES BEFORE ROAD)
6	PROP. SH-16	STA 136+10	Special Sign	-	3.75	-	-	13	-	SIGN RELOCATED FROM EX SH-16 STA 136+50 (CHICKEN CREEK)
7	PROP. SH-16	STA 137+45	Special Sign	-	3.75	-	-	13	-	SIGN RELOCATED FROM EX SH-16 STA 138+00 (CHICKEN CREEK)
8	PROP. SH-16	STA 154+20	W1-2L	-	6.25	-	-	13	-	INSTALL NEW SIGN (CURVE LEFT)
9	EX SH-16	STA 140+50	W1-2L	-	6.25	-	-	-	1	REMOVE (CURVE LEFT)
10	EX SH-16	STA 145+50	W8-13	-	6.25	-	-	-	1	REMOVE (BRIDGE ICES BEFORE ROAD)
11	PROP. 251st ST	STA 09+87	R1-1	-	6.25	-	-	13	-	INSTALL NEW SIGN (STOP)
12	PROP. 251st ST	STA 09+87	B-1224	-	2.00	-	-	-	-	INSTALL NEW SIGN (SECTION LINE INFO) ON STOP SIGN POLE
13	PROP. 251st ST	STA 09+87	D3-1	-	2.63	-	-	-	-	INSTALL NEW SIGN (251ST ST S)
14	PROP. 251st ST	STA 10+31	R1-1	-	6.25	-	1.25	13	-	INSTALL NEW SIGN (STOP)
SUB TOTALS:				-	68.38	9	-	91	5	
TOTALS:					77.00		2.00	91.00	5	

SUMMARY OF STRIPING

STATION TO STATION	LENGTH	DASH/SOLID	SIDE	TRAFFIC STRIPE (MULTI-POLY.)		DESCRIPTION
				(24" WIDE) 856(A)	(4" WIDE) 856(A)	
MAINLINE						
99+00.00 TO 108+00.00	900	SOLID	RT	-	900.00	4" YELLOW MULTI-POLY.
99+00.00 TO 108+00.00	900	DASH	LT	-	252.00	4" YELLOW MULTI-POLY.
108+00.00 TO 110+00.00	200	DASH	-	-	60.00	4" YELLOW MULTI-POLY.
110+00.00 TO 120+00.00	1000	DASH	RT	-	276.00	4" YELLOW MULTI-POLY.
110+00.00 TO 120+00.00	1000	SOLID	LT	-	1000.00	4" YELLOW MULTI-POLY.
120+00.00 TO 153+50.00	3350	DASH	-	-	900.00	4" YELLOW MULTI-POLY.
133+12.50 TO 133+87.50	75	BREAK	ALL	-	-	NO STRIPE
99+06.00 TO 153+53.00	5447	SOLID	RT	-	5372.00	4" WHITE MULTI-POLY.
100+61.00 TO 151+98.00	5137	SOLID	LT	-	5062.00	4" WHITE MULTI-POLY.
251ST						
8+00.00 TO 9+70.00	170	DOUBLE	-	-	340.00	4" YELLOW MULTI-POLY.
10+52.50 TO 12+47.00	194.5	DOUBLE	-	-	389.00	4" YELLOW MULTI-POLY.
9+75.00 TO -	14	SOLID	RT	14.00	-	24" WHITE MULTI-POLY.
10+55.00 TO -	14	SOLID	LT	14.00	-	24" WHITE MULTI-POLY.
TOTALS:					28.00	14551.00

SUMMARY OF TEMPORARY TRAFFIC QUANTITIES

ITEM NO.	CODE NO.	DESCRIPTION	UNIT	PHASE 1	PHASE 2	PHASE 3	TOTAL
				(30 DAYS)	(60 DAYS)	(60 DAYS)	
857(A)	8839	CONSTRUCTION TRAFF. STR.(PAINT)(4" WIDE)	LF	8044	10706	18290	37041
857(C)	8851	REMOVABLE PAVEMENT MARKING TAPE(4" WIDE)	LF	2442	1150	1324	4916
857(F)	8006	PAVEMENT MRKNG.REMOVAL(TRAF.STRP)	LF	7098	7098	850	15047
871(B)	8705	(SP)CONST.ZONE IMPACT ATTEN.	SD	520	-	-	520
877(B)	8484	DELIVER PORTABLE LONGITUDINAL BARRIER	LF	2799	-	-	2799
877(C)	8486	RELOCATION OF PORTABLE LONGITUDINAL BARRIER	LF	1400	-	-	1400
880(B)	8818	CONSTRUCTION SIGNS 0 TO 6.25 SF	SD	3380	2040	2160	7580
880(B)	8821	CONSTRUCTION SIGNS 6.26 SF TO 15.99 SF	SD	130	60	60	250
880(B)	8824	CONSTRUCTION SIGNS 16.0 SF TO 32.99 SF	SD	2080	960	960	4000
880(C)	8842	CONSTRUCTION BARRICADES(TYPE III)	SD	1300	720	900	2920
880(C)	8848	WING BARRICADES	SD	520	240	240	1000
880(E)	8860	WARNING LIGHTS(TYPE A)	SD	1300	600	600	2500
880(F)	8878	DRUMS	SD	6630	8220	12600	27450
880(I)	8902	FLAGGER	SD	50	25	25	100
882(A)	8306	PORT.CHANGEABLE MESSAGE SIGN	SD	130	60	60	250

DESIGN	KMW	I-16
DRAWN	KMW	4-16
CHECKED	TAC	5-16
APPROVED		
SQUAD	SCHMIDT	

S.H.-16 OVER CHICKEN CREEK

SUMMARY SHEET
(TRAFFIC)

STATE JOB NO. 28858(04) SHEET NO. 8
CREEK COUNTY SH-16