


DESCRIPTION	REVISIONS	DATE

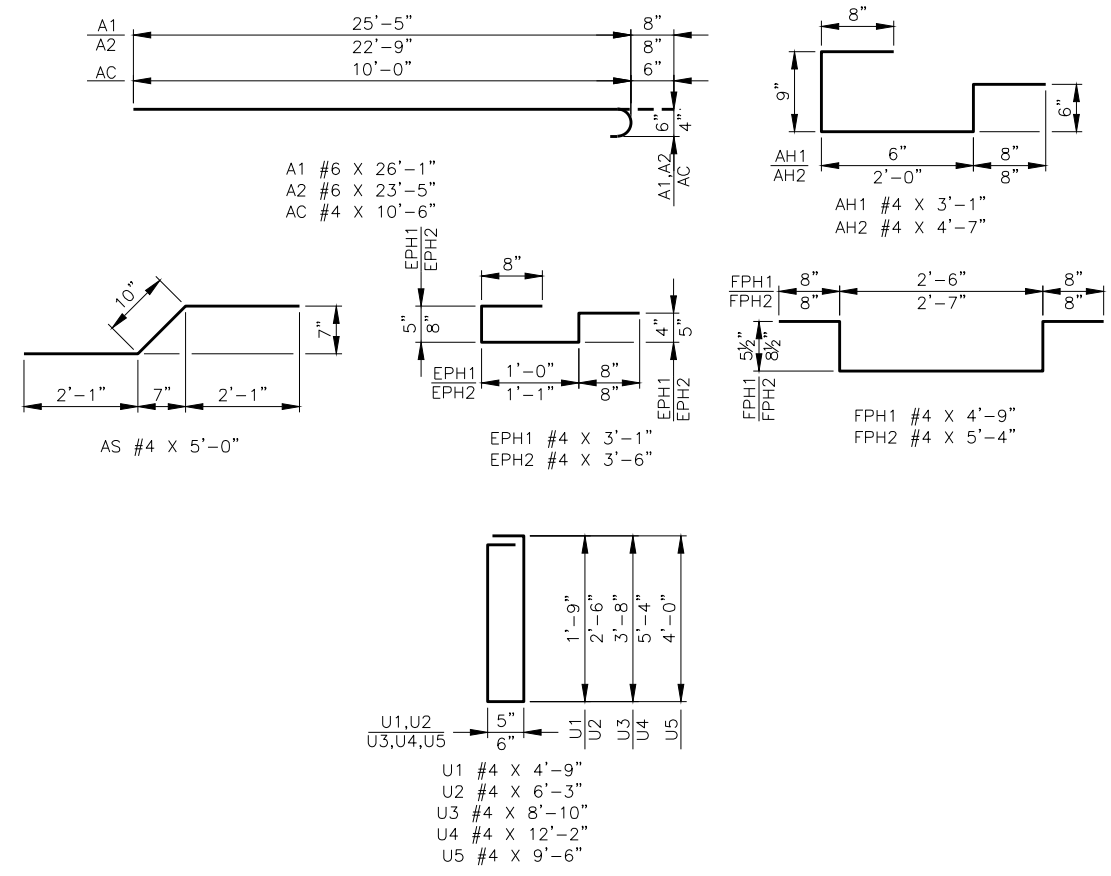


SUPERSTRUCTURE BAR LIST				
PHASE I				
EPOXY COATED REINFORCING				
MARK	SIZE	NO.	FORM	LENGTH
A1	#6	1,072	BNT.	26'-1"
AC	#4	1,067	BNT.	10'-6"
AH1	#4	18	BNT.	3'-1"
AH2	#4	32	BNT.	4'-7"
AS	#4	48	BNT.	5'-0"
AT1	#4	4	STR.	24'-6"
B1	#6	1,092	STR.	26'-11"
EB1	#5	32	STR.	208'-4"
EB2	#5	32	STR.	247'-6"
EB3	#5	64	STR.	122'-2"
EB4	#5	32	STR.	125'-7"
EPH1	#4	24	BNT.	3'-1"
EPH2	#4	168	BNT.	3'-6"
EPT1	#4	8	STR.	24'-6"
ET1	#4	24	STR.	206'-10"
ET2	#4	24	STR.	246'-0"
ET3	#4	48	STR.	121'-8"
ET4	#4	24	STR.	124'-7"
F1	#4	40	STR.	8'-6"
F2	#4	32	STR.	7'-6"
F3	#4	280	STR.	8'-8"
F4	#4	40	STR.	5'-8"
F5	#6	240	STR.	8'-8"
FPH1	#4	20	BNT.	4'-9"
FPH2	#4	21	BNT.	5'-4"
FPT1	#4	2	STR.	21'-3"
FPT2	#4	2	STR.	22'-2"
FPT3	#4	2	STR.	22'-2"
SR1	#5	1,520	BNT.	4'-1"
U1	#4	40	BNT.	4'-9"
U2	#4	72	BNT.	6'-3"
U3	#4	220	BNT.	8'-10"
U4	#4	140	BNT.	12'-2"
U5	#4	80	BNT.	9'-6"

- ① BAR LENGTH INCLUDES THREE 2'-6" LAPS.
- ② BAR LENGTH INCLUDES ONE 2'-6" LAPS.
- ③ BAR LENGTH INCLUDES TWO 2'-6" LAPS.
- ④ BAR LENGTH INCLUDES THREE 2'-0" LAPS.
- ⑤ BAR LENGTH INCLUDES ONE 2'-0" LAPS.
- ⑥ BAR LENGTH INCLUDES TWO 2'-0" LAPS.
- ⑦ FOR BAR BEND, SEE STD. TR4-2.

SUPERSTRUCTURE BAR LIST				
PHASE II				
EPOXY COATED REINFORCING				
MARK	SIZE	NO.	FORM	LENGTH
A2	#6	1,072	BNT.	23'-5"
AC	#4	1,067	BNT.	10'-6"
AH1	#4	18	BNT.	3'-1"
AH2	#4	32	BNT.	4'-7"
AS	#4	48	BNT.	5'-0"
AT2	#4	4	STR.	22'-9"
B2	#6	1,092	STR.	22'-9"
EB1	#5	32	STR.	208'-4"
EB2	#5	32	STR.	247'-6"
EB3	#5	64	STR.	122'-2"
EB4	#5	32	STR.	125'-7"
EPH1	#4	24	BNT.	3'-1"
EPH2	#4	168	BNT.	3'-6"
EPT2	#4	8	STR.	22'-9"
ET1	#4	24	STR.	206'-10"
ET2	#4	24	STR.	246'-0"
ET3	#4	48	STR.	121'-8"
ET4	#4	24	STR.	124'-7"
F1	#4	40	STR.	8'-6"
F2	#4	32	STR.	7'-6"
F3	#4	280	STR.	8'-8"
F4	#4	40	STR.	5'-8"
F5	#6	240	STR.	8'-8"
FPH1	#4	20	BNT.	4'-9"
FPH2	#4	21	BNT.	5'-4"
FPT2	#4	2	STR.	20'-4"
FPT4	#4	2	STR.	20'-5"
SR1	#5	1,520	BNT.	4'-1"
U1	#4	40	BNT.	4'-9"
U2	#4	72	BNT.	6'-3"
U3	#4	220	BNT.	8'-10"
U4	#4	140	BNT.	12'-2"
U5	#4	80	BNT.	9'-6"

- ① BAR LENGTH INCLUDES THREE 2'-6" LAPS.
- ② BAR LENGTH INCLUDES ONE 2'-6" LAPS.
- ③ BAR LENGTH INCLUDES TWO 2'-6" LAPS.
- ④ BAR LENGTH INCLUDES THREE 2'-0" LAPS.
- ⑤ BAR LENGTH INCLUDES ONE 2'-0" LAPS.
- ⑥ BAR LENGTH INCLUDES TWO 2'-0" LAPS.
- ⑦ FOR BAR BEND, SEE STD. TR4-2.

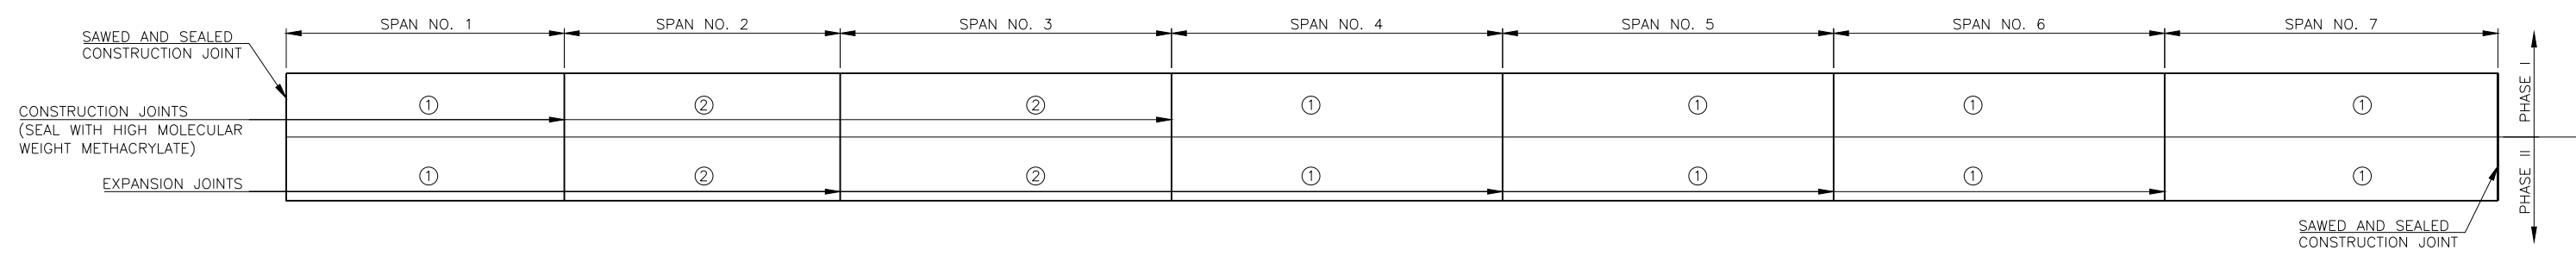

DECK SLAB POURING SEQUENCE DIAGRAM

NOTE:
 THE DECK SLAB IS DIVIDED INTO SECTIONS BETWEEN CONSTRUCTION AND EXPANSION JOINTS AS SHOWN. THE CONCRETE SHALL BE POURED IN EACH SECTION OF THE DECK SLAB IN THE NUMERICAL SEQUENCE INDICATED. SECTIONS OF THE DECK SLAB WITH THE SAME NUMBER MAY BE POURED IN ANY ORDER, UNDER NO CIRCUMSTANCES WILL A SECTION IN SEQUENCE 2 BE POURED BEFORE THE ADJACENT SECTIONS HAVE BEEN IN PLACE FOR AT LEAST 48 HOURS.

DESIGN	B.J.K.	SH-48 OVER CIMARRON RIVER	CREEK COUNTY
DRAWN	B.M.S.	SLAB REINFORCING DETAILS	
CHECKED	M.R.S.		
APPROV.	B.J.K.		
SQUAD	CEC		
		JOB PIECE NO. 27925(04)	SHEET NO. 58