


- NOTES:
1. MATERIALS FOR THE ROCK BASE SHALL BE IN ACCORDANCE WITH 2009 STANDARD SPECIFICATIONS SEC. 713.03 STONE FILL FOR GABIONS AND REVETMENT MATTRESSES.
  2. SEPARATOR FABRIC SHALL BE PLACED OVER THE EXISTING GROUND PRIOR TO THE STONE FILL.
  3. LOCATION OF STABILIZED CONSTRUCTION EXIT TO BE AS APPROVED BY THE ENGINEER.
  4. MINIMUM DIMENSIONS SHALL BE 42" WIDE AND 50' LONG WITH 20' RETURNS.
  5. ESTIMATED 135 TONS ROCK PER EXIT.

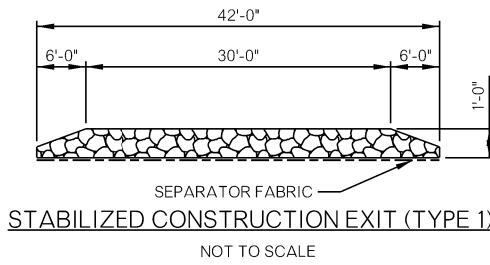

KEY	
xxxxxxx	TEMPORARY SILT FENCE
△△△	TEMPORARY SILT DIKE
▬▬▬	TEMPORARY SEDIMENT FILTER
▨▨▨	DISTURBED AREA

DESIGN	HEV	3/16	OKLAHOMA DEPARTMENT OF TRANSPORTATION US-64/SH-51 OVER SHERIDAN RD. <b>EROSION CONTROL PLAN</b>				
DRAWN	T.J.H.	9/16					
CHECKED	NAB	7/17					
APPROVED							
SQUAD	<b>GARVER</b>						
COUNTY	TU, SA	HIGHWAY	SH-51	STATE JOB NO.	28878(04)	SHEET NO.	11