




OKLAHOMA DEPARTMENT OF TRANSPORTATION		
STANDARD REVISIONS		
DESCRIPTION	DATE	

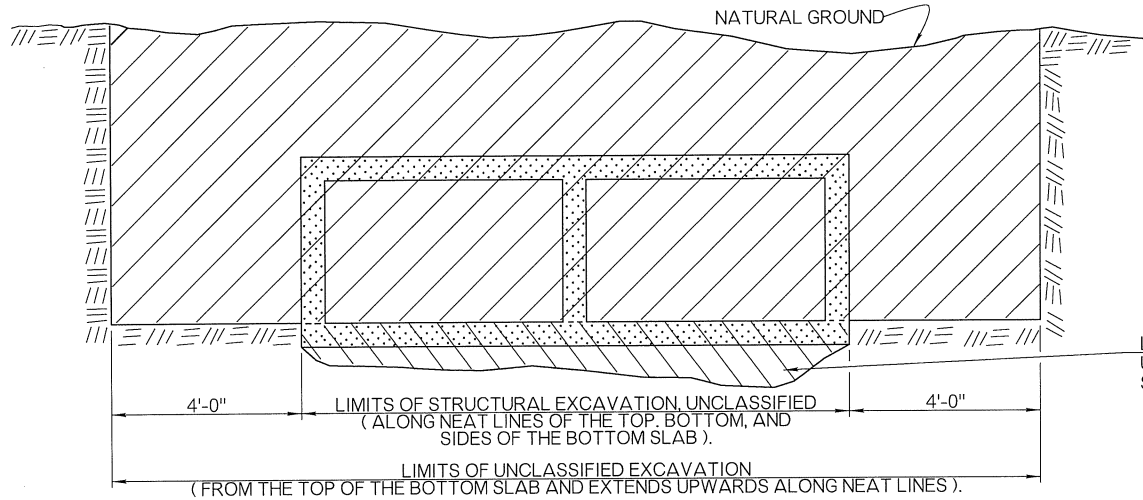


REQUIREMENTS FOR UNCLASSIFIED AND STRUCTURAL EXCAVATION OF RCB STORM SEWERS

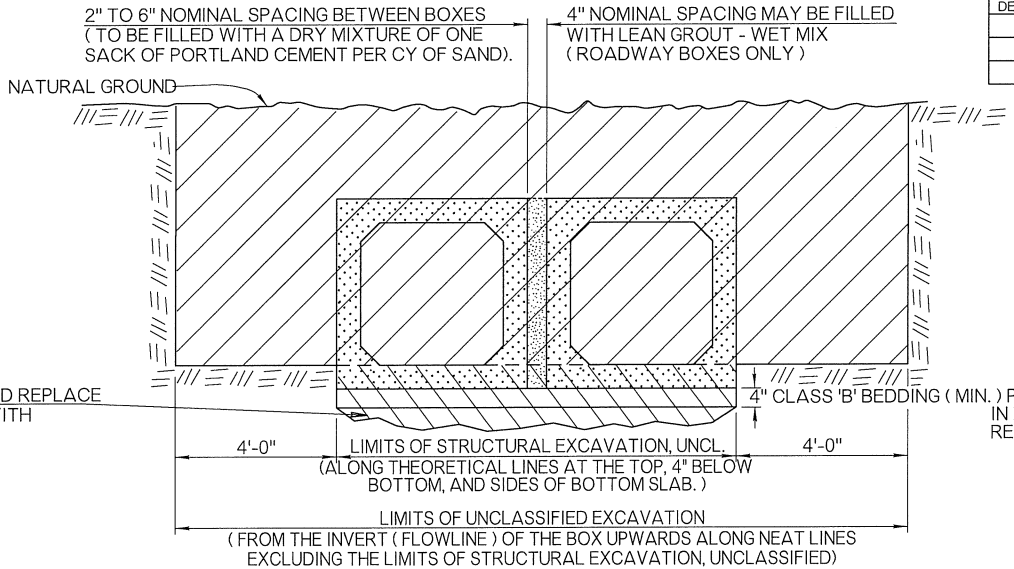

REQUIREMENTS FOR EXCAVATION OF PRECAST RCB STORM SEWERS

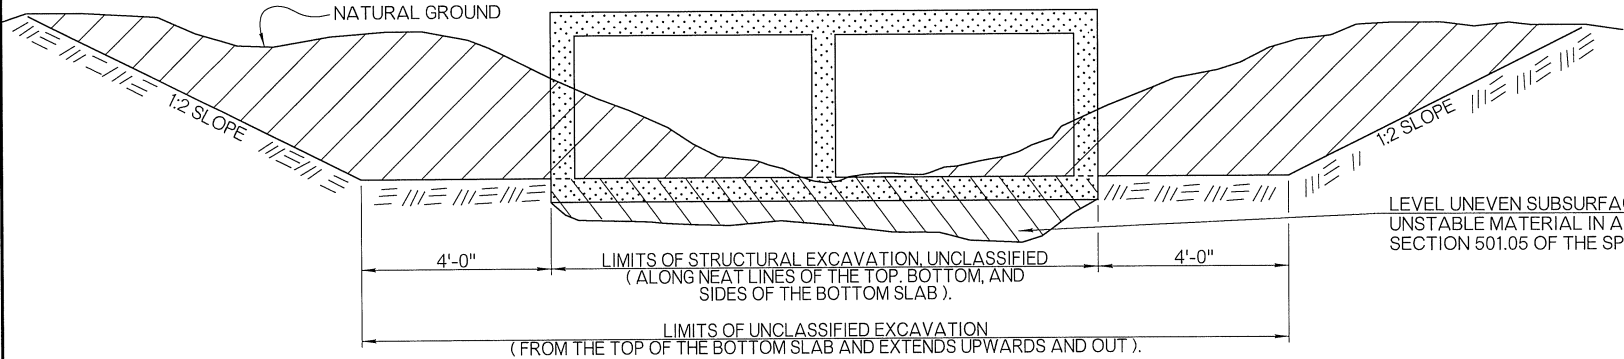

REQUIREMENTS FOR UNCLASSIFIED AND STRUCTURAL EXCAVATION OF RCB CULVERTS OF ROADWAY AND BRIDGE CLASSIFICATION

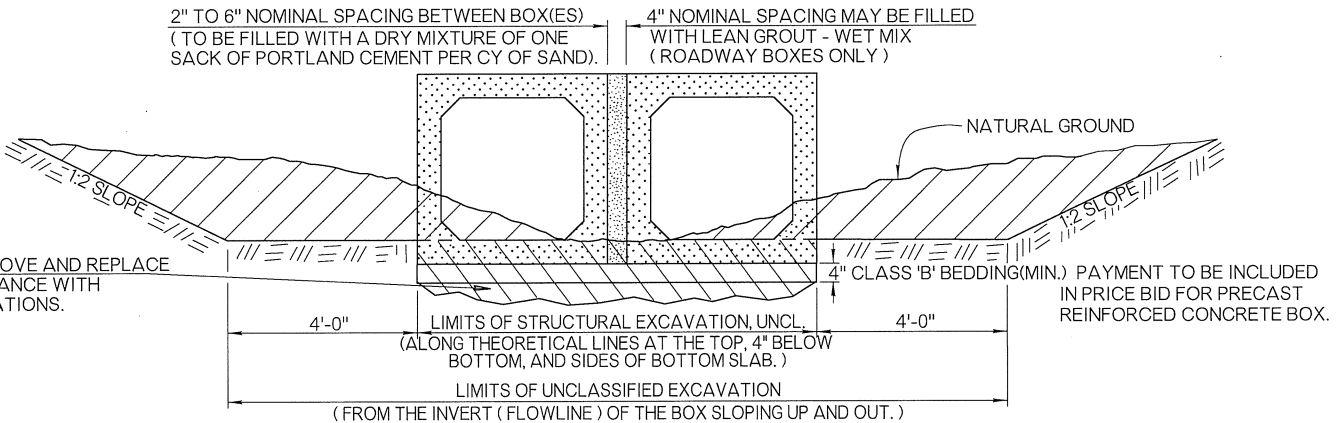

REQUIREMENTS FOR EXCAVATION OF PRECAST RCB CULVERTS OF ROADWAY AND BRIDGE CLASSIFICATION.

GENERAL NOTES

- ALL CONSTRUCTION AND MATERIAL REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE 2009 ODOT STANDARD SPECIFICATIONS.
- PAYMENT FOR CAST-IN-PLACE REINFORCED CONCRETE BOXES WILL BE IN CUBIC YARDS OF CLASS A OR CLASS AA CONCRETE AND POUNDS OF REINFORCING STEEL, IN ACCORDANCE WITH SECTION 509 AND 511 OF THE SPECIFICATIONS.
- PAYMENT FOR PRECAST CONCRETE BOX CULVERTS WILL BE MADE BASED ON THE UNIT PRICE BID FOR ITEMS AND QUANTITIES OF A CAST-IN-PLACE BOX OF THE LENGTH REQUIRED AS DETERMINED BY FIELD MEASUREMENTS, AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH SECTION 508 OF THE SPECIFICATIONS.
- PRECAST CONCRETE BOX SECTIONS, USED IN LIEU OF CAST-IN-PLACE CONCRETE BOXES, SHALL MEET MINIMUM DESIGN REQUIREMENTS OF AASHTO M 259 OR M 273, AND ASTM C1433 OR C1577, AND JOINT FILLER SHALL MEET THE REQUIREMENTS OF SUBSECTION 726.01.B OF THE SPECIFICATIONS.


BASIS OF PAYMENT		
ITEM NO.	ITEM	UNIT
202 (A)	UNCLASSIFIED EXCAVATION	CY
501 (A)	STRUCTURAL EXCAVATION UNCLASSIFIED	CY
619 (B)	REMOVAL OF HEADWALL	EA

APPROVED BY
ROADWAY ENGINEER: *Calvin A. [Signature]* DATE: *04/14/15*


ROADWAY DESIGN DIVISION STANDARD

DOT


STANDARD BOX INSTALLATION

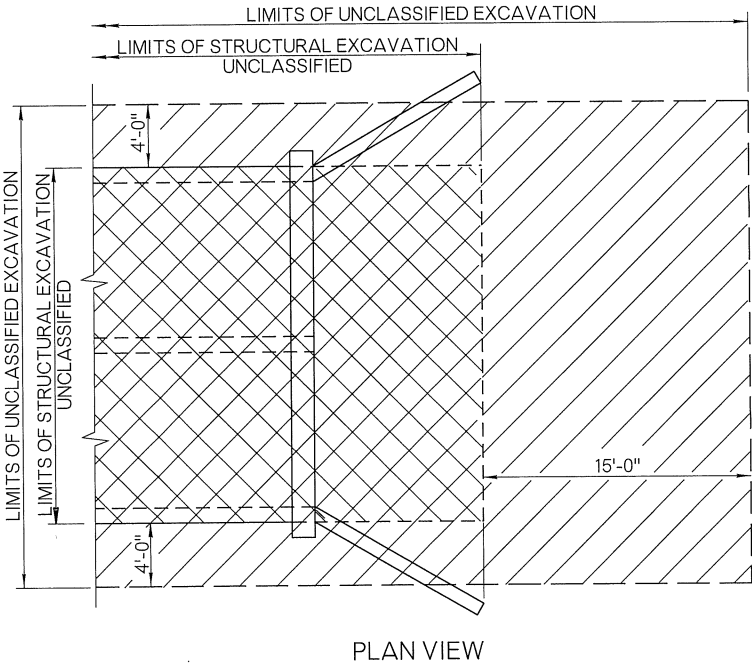

PLAN VIEW

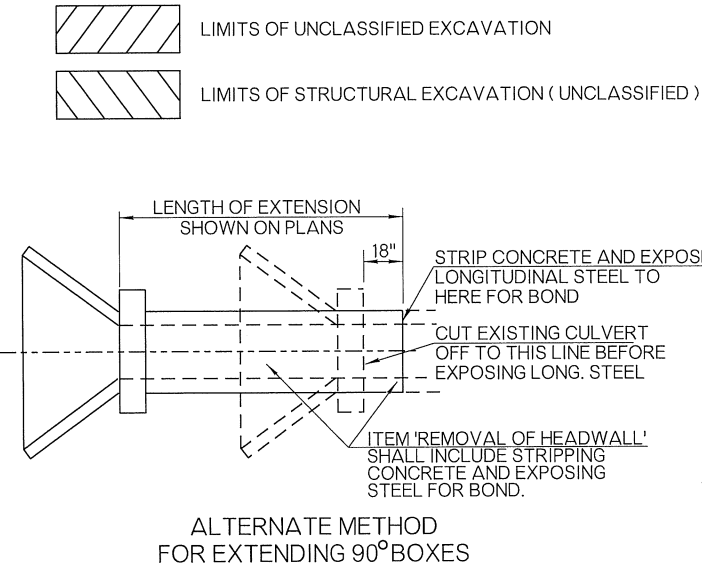

ALTERNATE METHOD FOR EXTENDING 90° BOXES

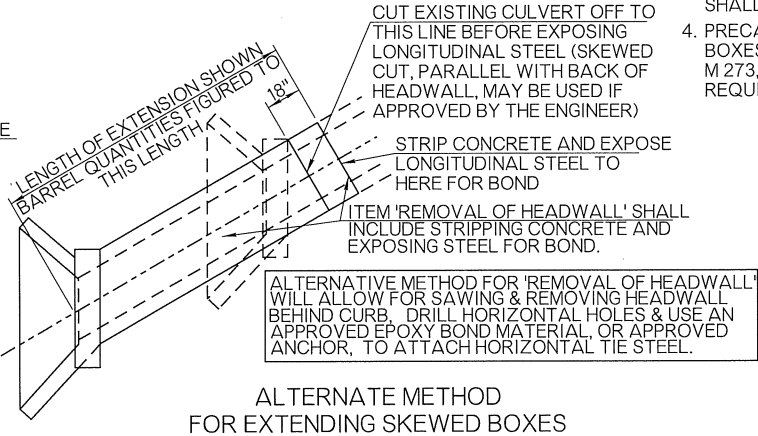

ALTERNATE METHOD FOR EXTENDING SKEWED BOXES