

REVISION	DESCRIPTION	DATE
1	UPDATED QTYS	7/12/18
2	REVISED TABLES	7/27/16


JP 28865(04) SUMMARY OF QUANTITIES			
0300 TRAFFIC			
DESCRIPTION	UNIT	JP 28865(04)	
2" GALV. STEEL ELECTRICAL CONDUIT EXPOSED	(1) LF	760.00	
2" GALV. STEEL ELECTRICAL CONDUIT TRENCHED	(1) LF	30.00	
JUNCTION BOX(6" X 6" X 4")	(1) EA	4.00	
PULL BOX(SIZE I)	(1)(P-1) EA	4.00	
(PL)REMOVAL OF LIGHT POLE	(2) EA	4.00	
(PL)REMOVE & RESET EXISTING SIGNS	(5) EA	1.00	
POLE & 10' TS MST.ARM(G.STL.)	(1)(2) EA	4.00	
ROADWAY LUMINAIRE	(1) EA	4.00	
UNDERPASS LUMINAIRE	(1) EA	4.00	
GUARDRAIL DELINEATORS(TYPE 1, CODE 1)	(3) EA	15.00	
TRAFFIC STRIPE(MULTI-POLYMER)(4" WIDE)	(TS-24) LF	1616.00	
TRAFFIC STRIPE(MULTI-POLY)(8" WIDE)	(TS-26) LF	236.00	
REMOVABLE PAVEMENT MARKING TAPE(4" WIDE)	(TC-13,14,19,20,61,70,75) LF	7505.00	
PAVEMENT MARKING REMOVAL(TRAFFIC STRIPE)	(TC-22,61,70,75)(6) LF	7505.00	
(PL)CONSTRUCTION ZONE PAVEMENT MARKERS(FLEX TAB)TYPE 2-1	EA	600.00	
(SP)IMPACT ATTENUATOR	(4) EA	1.00	
(SP)CONST.ZONE IMPACT ATTN.	(TC-52,77,78,80,84) SD	165.00	
DELIVER PORTABLE LONGITUDINAL BARRIER	(TC-1,2) LF	1780.00	
RELOCATION OF PORTABLE LONGITUDINAL BARRIER	(TC-1,2) LF	2490.00	
ARROW DISPLAY(TYPE C)	(TC-84) SD	45.00	
CONSTRUCTION SIGNS 0 TO 6.25 SF	(TC-23,26,28,33,84) SD	9090.00	
CONSTRUCTION SIGNS 6.26 SF TO 15.99 SF	(TC-26,29,33,84) SD	2760.00	
CONSTRUCTION SIGNS 16 SF TO 32.99 SF	(TC-26,30,33,84) SD	4200.00	
CONSTRUCTION BARRICADES(TYPE III)	(TC-26,84) SD	7170.00	
WING BARRICADES	(TC-26,84) SD	330.00	
WARNING LIGHTS(TYPE A)	(TC-26,84) SD	1800.00	
DRUMS	(TC-26,84) SD	7170.00	
TUBE CHANNELIZERS	SD	4270.00	
PORT.CHANGEABLE MESSAGE SIGN	(TC-52,70,84,85) SD	190.00	

NOTE:
PAY ITEM NOTES LISTED ONLY PERTAIN TO JP 28865(04) FOR
ADDITIONAL PAY ITEM NOTES SPECIFIC TO EACH PROJECT REFER
TO THE NECESSARY PLAN SHEET OF THE RESPECTIVE JOB PIECE
NUMBER

MANDATORY TIE
THIS PROJECT SHALL BE MANDATORILY TIED WITH
TULSA COUNTY JOB PIECES: 28880(04), 28879(04),
28868(04) AND SHALL BE BID ACCORDINGLY.

SUMMARY OF PAY QUANTITIES				
0300 TRAFFIC				
ITEM NUMBER		DESCRIPTION	UNIT	TOTAL
802(A)	8310	2" GALV. STEEL ELECTRICAL CONDUIT EXPOSED	LF	1140
802(A)	8314	2" GALV. STEEL ELECTRICAL CONDUIT TRENCHED	LF	30
802(E)	8370	JUNCTION BOX(6" X 6" X 4")	EA	6
803(A)	8065	PULL BOX(SIZE I)	EA	6
805(A)	8712	(PL)REMOVAL OF LIGHT POLE	EA	6
805(B)	8732	(PL)RESET OF LIGHT POLE	EA	2
805(D)	8756	(PL)REMOVE & RESET EXISTING SIGNS	EA	8
806(A)	8720	POLE & 10' TS MST.ARM(G.STL.)	EA	4
809(A)	8090	ROADWAY LUMINAIRE	EA	6
809(B)	8098	UNDERPASS LUMINAIRE	EA	4
853	9066	GUARDRAIL DELINEATORS(TYPE 1, CODE 1)	EA	15
855(A)	8612	TRAFFIC STRIPE(PLASTIC)(4" WIDE)	LF	654
856(A)	8530	TRAFFIC STRIPE(MULTI-POLYMER)(4" WIDE)	LF	2270
856(A)	8535	TRAFFIC STRIPE(MULTI-POLY)(6" WIDE)	LF	1200
856(A)	8540	TRAFFIC STRIPE(MULTI-POLY)(8" WIDE)	LF	236
857(C)	8851	REMOVABLE PAVEMENT MARKING TAPE(4" WIDE)	LF	10505
857(F)	8006	PAVEMENT MARKING REMOVAL(TRAFFIC STRIPE)	LF	10679
857(E)	8887	(PL)CONSTRUCTION ZONE PAVEMENT MARKERS(FLEX TAB)TYPE 2-1	EA	1200
871(A)	8325	(SP)IMPACT ATTENUATOR	EA	1
871(B)	8705	(SP)CONST.ZONE IMPACT ATTN.	SD	165
876(A)	8482	(PL)TRUCK MOUNTED ATTENUATOR	SD	28
877(B)	8484	DELIVER PORTABLE LONGITUDINAL BARRIER	LF	1780
877(C)	8486	RELOCATION OF PORTABLE LONGITUDINAL BARRIER	LF	2490
880(A)	8812	ARROW DISPLAY(TYPE C)	SD	235
880(B)	8818	CONSTRUCTION SIGNS 0 TO 6.25 SF	SD	23880
880(B)	8821	CONSTRUCTION SIGNS 6.26 SF TO 15.99 SF	SD	14820
880(B)	8824	CONSTRUCTION SIGNS 16 SF TO 32.99 SF	SD	6535
880(C)	8842	CONSTRUCTION BARRICADES(TYPE III)	SD	12420
880(C)	8848	WING BARRICADES	SD	550
880(E)	8860	WARNING LIGHTS(TYPE A)	SD	10020
880(F)	8878	DRUMS	SD	18930
880(G)	8884	TUBE CHANNELIZERS	SD	9220
880(G)	8890	CHANNELIZER CONES	SD	1540
880(L)	8911	TRAFFIC SURVEILLANCE, POLICE	HOUR	87
882(A)	8306	PORT.CHANGEABLE MESSAGE SIGN	SD	910

N:\11399\200-11399-13001-05\CAD\SheetFiles\JP 28865 (04) -09-RD-Traffic Pay Quant-Notes_2_Rev 2.dgn 7/27/2016

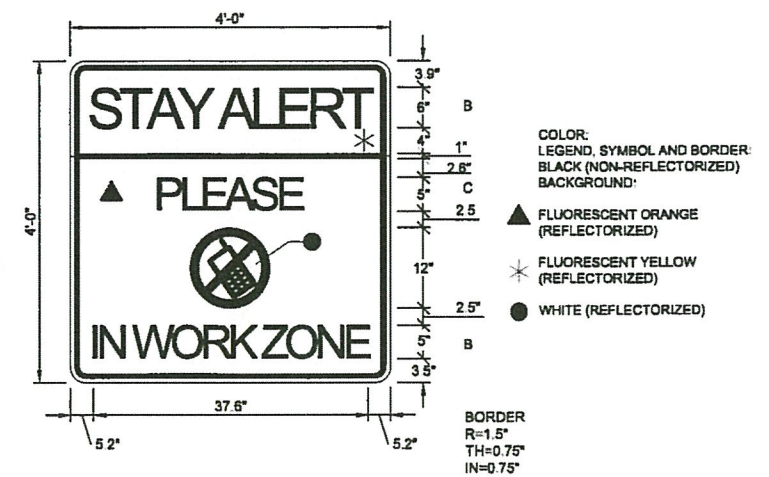

DESIGN		OKLAHOMA DEPARTMENT OF TRANSPORTATION
DRAWN		
CHECKED		
APPROVED		
CREW		
SUMMARY OF PAY QUANTITIES AND NOTES (TRAFFIC) (SHEET 2 OF 2)		
STATE JOB NO. 28865(04) SHEET NO. 9		