


DO NOT PLACE THE CONCRETE FOR THE DECK SLAB OR APPLY OTHER MASSIVE LOADS TO THE BEAMS UNTIL THE DIAPHRAGMS ARE IN PLACE AND ALL BOLTS HAVE BEEN TIGHTENED.

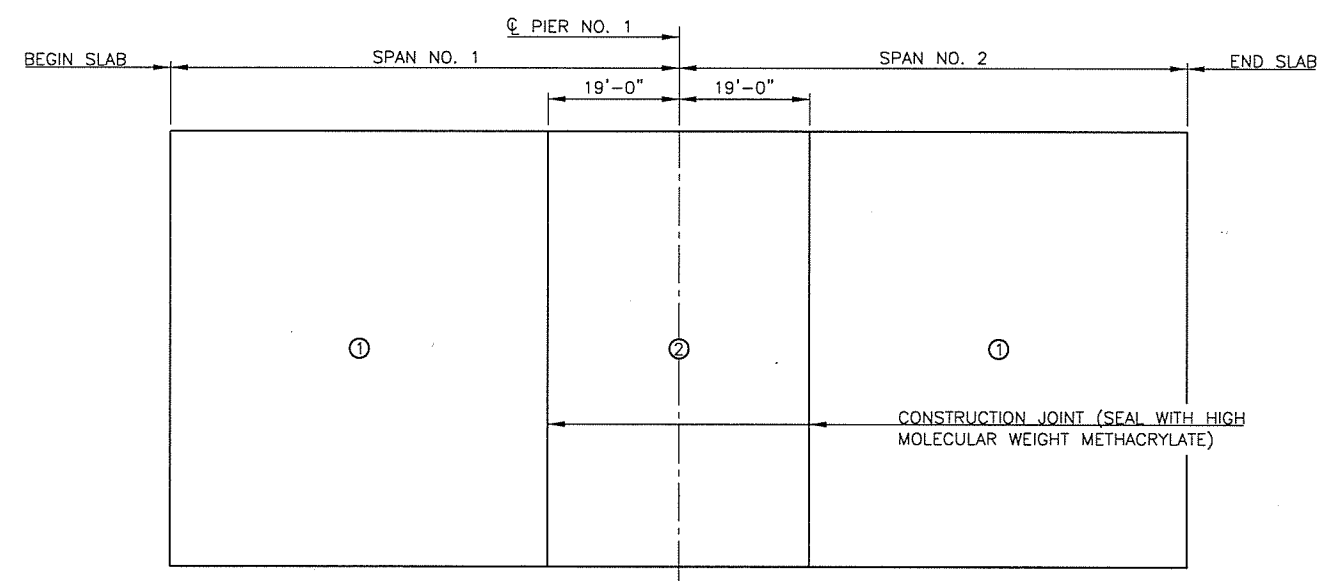

DECK SLAB POURING SEQUENCE DIAGRAM

NOTE:
 THE DECK SLAB IS DIVIDED INTO SECTIONS BETWEEN CONSTRUCTION JOINTS AS SHOWN. THE CONCRETE SHALL BE POURED IN EACH SECTION OF THE DECK SLAB IN THE NUMERICAL SEQUENCE INDICATED. SECTIONS OF THE DECK SLAB WITH THE SAME NUMBER MAY BE POURED IN ANY ORDER. UNDER NO CIRCUMSTANCES WILL THE SECTION IN SEQUENCE 2 BE POURED BEFORE THE ADJACENT SECTIONS HAVE BEEN IN PLACE FOR AT LEAST 48 HOURS.

SUPERSTRUCTURE QUANTITIES		
ITEM	UNIT	TOTAL
SAW-CUT GROOVING	S.Y.	804
SEALED EXPANSION JOINT	L.F.	125.2
CONCRETE PARAPET	L.F.	443.0
STRUCTURAL STEEL	LB.	208,740
WEATHERING STEEL FIXED BEARING ASSEMBLY	EA.	8
WEATHERING STEEL EXPANSION BEARING ASSEMBLY	EA.	16
CLASS AA CONCRETE	C.Y.	292.5
EPOXY COATED REINFORCING STEEL	LB.	75,230
WATER REPELLENT (VISUALLY INSPECTED)	S.Y.	649
SEALER CRACK PREPARATION	L.F.	151
SEALER RESIN	GAL.	2
REMOVAL OF BRIDGE ITEMS	LSUM.	1

DESIGN	B.J.K.	4TH OVER 1-444	TULSA COUNTY
DRAWN	R.A.P., Z.M.B.		
CHECKED	B.J.K., J.W.H.		
APPROV.	T.A.C.		
SQUAD	CEC	JOB PIECE NO. 28868(04)	SHEET NO. 16

LONGITUDINAL SECTION