

PAY QUANTITIES				
0100 ROADWAY				
ITEM		DESCRIPTION	UNIT	TOTAL
221(C)	2801	TEMPORARY SILT FENCE	L.F.	124.00
221(F)	0100	TEMPORARY SILT DIKE	L.F.	12.00
230(A)	2806	SOLID SLAB SODDING (R-8)	S.Y.	1,078.00
509(D)	0325	CLASS C CONCRETE	C.Y.	2.00
609(B)	1513	1'-8" COMB. CURB & GUTTER (6" BARRIER)	L.F.	225.00
610(B)	0399	6" CONCRETE DRIVEWAY (H.E.S.)	S.Y.	244.00
619(B)	4766	REMOVAL OF CONCRETE DRIVEWAY (R-49)(R-50)	S.Y.	654.00
619(B)	4767	REMOVAL OF ASPHALT DRIVEWAY (R-49)(R-50)	S.Y.	684.00
619(B)	4791	REMOVAL OF CURB (R-49)(R-50)	L.F.	5.00
619(C)	0924	SAWING PAVEMENT	L.F.	443.00

SEQUENCE OF CONSTRUCTION

1. REMOVE EXISTING CONCRETE NECESSARY TO CONSTRUCT NEW DRIVE.
2. CONSTRUCT DRIVE.
3. REMOVE REMAINDER OF EXISTING CONCRETE.
4. CONSTRUCT CURB & GUTTER ALONG EDGE OF SHOULDER.
5. BACKFILL WITH TOP SOIL AND GRADE TO DRAIN.
6. SOD DISTURBED AREA.
7. CONSTRUCT SIGNALS.

GENERAL CONSTRUCTION NOTES


THIS PROJECT SHALL BE CONSTRUCTED WITHOUT CLOSING THE EXISTING ROAD TO LOCAL AND THROUGH TRAFFIC. SEE STANDARD SPECIFICATIONS FOR MAINTENANCE OF LOCAL AND THROUGH TRAFFIC.

THIS PROJECT SHALL BE CONSTRUCTED WITHOUT CLOSING THE EXISTING SECTION LINE ROADS TO LOCAL AND THROUGH TRAFFIC. SEE STANDARD SPECIFICATIONS FOR MAINTENANCE OF LOCAL AND THROUGH TRAFFIC.


PRIOR TO FINAL ACCEPTANCE, ALL EXPOSED CURB SURFACES SHALL BE CLEANED OF ALL DISCOLORATION SUCH AS ASPHALT STAIN, TIRE MARKS, OR OTHER DISFIGUREMENT.

PAY QUANTITY NOTES

- (R-8) FOR SOLID SLAB SODDING PRICE BID TO INCLUDE COST OF WATERING, ESTIMATED AT 40 GALLONS PER SQUARE YARD OF SODDING.
- (R-49) TO BECOME THE PROPERTY OF AND BE DISPOSED OF BY THE CONTRACTOR IN A MANNER APPROVED BY THE ENGINEER.
- (R-50) MATERIALS REMOVED SHALL NOT BE MEASURED FOR PAYMENT UNDER SECTION 202.06 UNCLASSIFIED EXCAVATION.

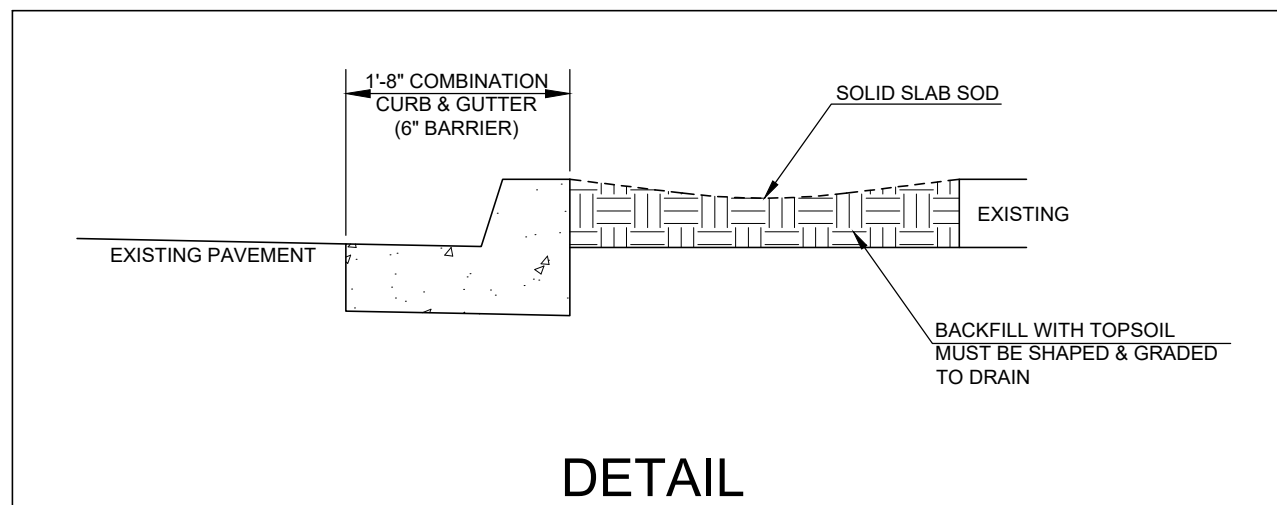

DETAIL



FINAL PLANS

SUMMARY OF PAY QUANTITIES & NOTES (ROADWAY)