
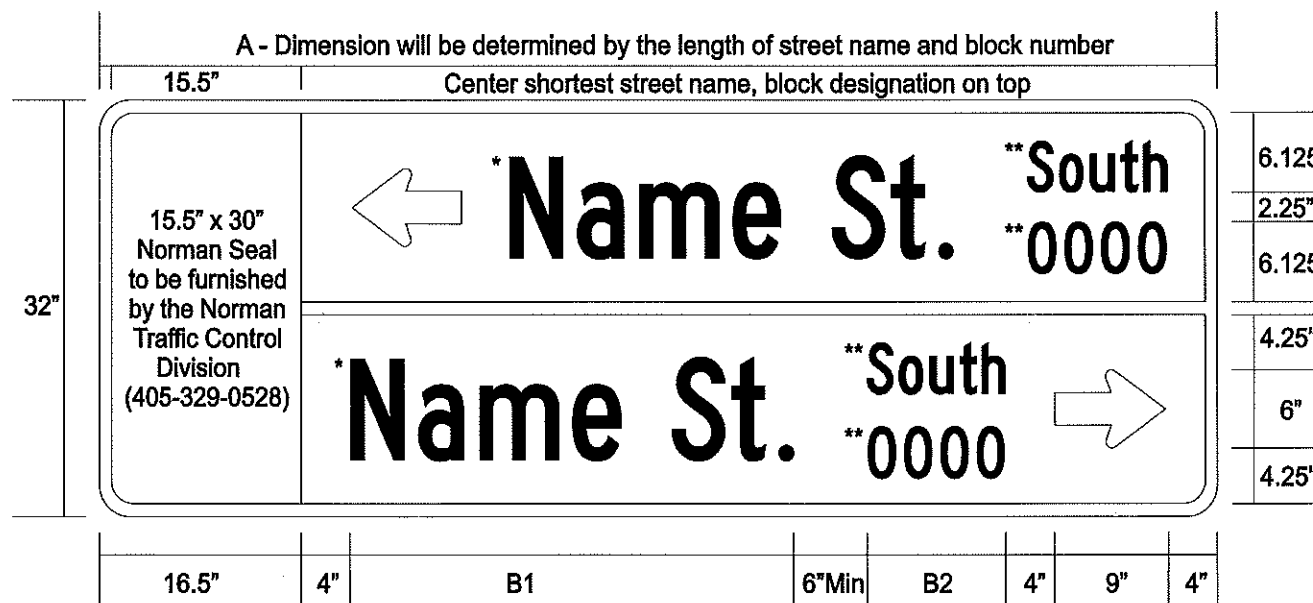


**MAST ARM STREET NAME SIGN DETAIL**  
(Messages for each Intersection are on Sheets in Plan Set that Follow)

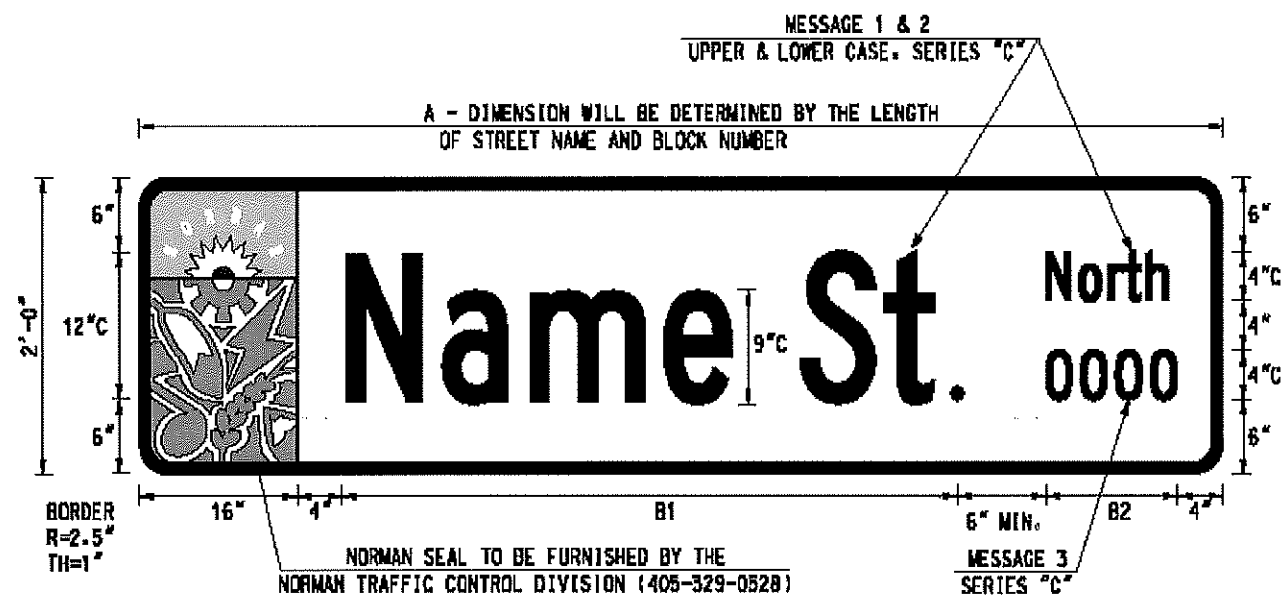

\* Street Name 8" HWY\_C2K  
\*\* Block Designation 4" HWY\_C2k  
1" Border

PAY QUANTITIES—TRAFFIC				
0300 TRAFFIC				
ITEM NO.	CODE NO.	DESCRIPTION	UNIT	QUANTITY
809(A)	8090	ROADWAY LUMINAIRE (SP-5)	EACH	87
825(A)	8559	SIGNAL SYSTEM CONTROLLER UPGRADE (SP-1)	EACH	340
830	8000	PEDESTRIAN PUSH BUTTON (SP-3)	EACH	216
831	8295	1WAY 2SEC. ADJ. PED. SIG. HD. S-20 (SP-4)	EACH	84
834(A)	8207	5/C TRAFFIC SIGNAL ELECTRICAL CABLE (TP-1)	L.F.	1,008
834(A)	8213	21/C TRAFFIC SIGNAL ELECTRICAL CABLE (TP-1)	L.F.	1,700
834(B)	8220	2/C SHIELDED LOOP DETECTOR LEAD-IN CABLE (TP-1)	L.F.	30
850(C)	8118	MAST ARM MOUNTED SIGNS (ALUMINUM) (SP-4)	SF	1,818.9
880(J)	8905	CONSTRUCTION TRAFFIC CONTROL (TC-25)	L SUM	1

PAY QUANTITIES—CONSTRUCTION				
0640 CONSTRUCTION				
ITEM NO.	CODE NO.	DESCRIPTION	UNIT	QUANTITY
641	1552	MOBILIZATION	L SUM	1