

GENERAL CONSTRUCTION NOTES

(TC-52) ANY SIGNS AND/OR DELINEATORS WHICH ARE TO BE REMOVED DURING THIS PROJECT WILL BE STORED IN A PROTECTED AREA DESIGNATED BY THE RESIDENT ENGINEER UNTIL SUCH A TIME THAT THEY ARE TO BE RESET BY THE CONTRACTOR. COST OF THIS WORK TO BE INCLUDED IN OTHER ITEMS OF WORK.

(TC-80) THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROPER BARRICADES, LIGHTS, SIGNING, AND SIGNING WITHIN THE LIMITS OF CONSTRUCTION AND DETOUR ROUTE(S). ALL CONSTRUCTION TRAFFIC CONTROL DEVICES, CURRENT EDITION, AND AS SHOWN ON TCS STANDARD DRAWINGS. ALL TEMPORARY TRAFFIC CONTROL DEVICES SHALL MEET ODOT'S "QUALITY STANDARDS FOR TEMPORARY TRAFFIC CONTROL DEVICES."

(TC-84) ANY DAMAGE CAUSED BY THE CONTRACTOR TO ANY STRUCTURES, ROADWAY SURFACES, STRIPING, RAISED PAVEMENT MARKERS, GUARDRAIL, ATTENUATORS, SLOPES, OR SIGNS SHALL BE REPLACED OR REPAIRED AT CONTRACTOR'S EXPENSE AND TO THE SATISFACTION OF THE ENGINEER.

(TC-85) THE ITEMS TO BE REMOVED AND/OR RESET SHALL BE HANDLED WITH CARE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE DURING THESE OPERATIONS. THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO PROTECT THE AREAS UNDER THE BRIDGES FROM FALLING DEBRIS AND BE SOLELY RESPONSIBLE FOR SAFEGUARDING THESE AREAS.

(TC-86) THE CONTRACTOR MUST NOTIFY THE RESIDENT ENGINEER 7 DAYS PRIOR TO ANY LANE CLOSURE.

(TC-87) THE CONTRACTOR SHALL PROVIDE A PERSON TO BE ON CALL AS NEEDED AS REFERRED TO IN THE SPECIFICATIONS FOR A CURRENT CERTIFICATION FROM THE AMERICAN TRAFFIC SAFETY SERVICE ASSOCIATION (ATSSA) OR THE OKLAHOMA TRAFFIC ENGINEERING ASSOCIATION (OTE) AS A TRAFFIC CONTROL TECHNICIAN OR TRAFFIC CONTROL SUPERVISOR.

(TC-88) REMOVED MATERIAL TO BECOME PROPERTY OF CONTRACTOR AND IT SHALL BE DISPOSED OF IN A MANNER APPROVED BY THE ENGINEER.

(TC-89) THIS PROJECT SHALL BE CONSTRUCTED WITHOUT CLOSING TRAFFIC ON CROSS STREETS A MINIMUM OF ONE LANE IN EACH DIRECTION SHALL BE MAINTAINED AT ALL TIMES. SEE O.D.O.T. STANDARDS AND DETAIL DRAWINGS FOR MAINTENANCE OF LOCAL AND THROUGH TRAFFIC.

(TC-90) ALL REGULATORY SIGNS SHALL HAVE HIGH INTENSITY SHEETING. THE HIGH INTENSITY SHEETING SHALL MEET THE REQUIREMENTS OF ASTM D4956-(LATEST REVISION) FOR TYPE III SHEETING.

(TC-91) ALL WARNING SIGNS SHALL HAVE FLOURESCENT YELLOW SHEETING. THE FLOURESCENT YELLOW SHEETING SHALL MEET THE REQUIREMENTS OF ASTM D4936-(LATEST REVISION) REQUIREMENTS FOR TYPE VIII SHEETING.

(TC-92) THE MANUFACTURER SHALL FURNISH A TYPE 'A' CERTIFICATION IN ACCORDANCE WITH ODOT STANDARD SPECIFICATIONS, LATEST EDITION, SUBSECTION 106.04. THE CERTIFICATION SHALL INCLUDE TEST RESULTS ON THE MATERIAL SUBMITTED FOR APPROVAL.

**PAY QUANTITY**

0300 TRAFFIC CONTROL				
ITEM NO.	CODE NO.	DESCRIPTION	UNIT	QUANTITY
871(B)	8705	(SP)CONST. ZONE IMPACT ATTEN.	SD	60.00
877(B)	8484	DELIVER PORTABLE LONGITUDINAL BARRIER	LF	862.50
877(C)	8486	RELOCATION OF PORTABLE LONGITUDINAL BARRIER	LF	2,212.50
880(A)	8812	ARROW DISPLAY (TYPE C)	SD	120.00
880(B)	8818	CONSTRUCTION SIGNS 0 TO 6.25 SF	SD	1,800.00
880(B)	8821	CONSTRUCTION SIGNS 6.26 SF TO 15.99 SF	SD	1,800.00
880(B)	8824	CONSTRUCTION SIGNS 16.0 SF TO 32.99 SF	SD	3,240.00
880(C)	8842	CONSTRUCTION BARRICADES(TYPE III)	SD	1,200.00
880(C)	8848	WING BARRICADES	SD	480.00
880(E)	8860	WARNING LIGHTS(TYPE A)	SD	3,600.00
880(F)	8878	DRUMS	SD	4,800.00
880(G)	8890	CHANNELIZER CONES	SD	6,000.00
882(A)	8306	PORTABLE CHANGEABLE MESSAGE SIGN	SD	296.00

SPECIAL PAY QUANTITY NOTES

(SP-1) TYPE 'C' WARNING LIGHTS ARE NOT REQUIRED.

(SP-2) CHANGEABLE MESSAGE SIGNS TO BE PLACED ON THE PROJECT 14 DAYS IN ADVANCE OF THE START DATE.

(SP-3) PRICE BID TO INCLUDE ALL DELINEATORS FOR TEMPORARY IN-PLACE BARRIER WALL IN ACCORDANCE WITH TRAFFIC STANDARD TC324-(LATEST REVISION).

PAY QUANTITY NOTES


(TC-1) THE CONTRACTOR SHALL FURNISH AND INSTALL SUCH LIGHTS, SIGNS, BARRICADES, AND PROVIDE FLAGGERS NECESSARY FOR THE CONTROL, SAFETY, AND MAINTENANCE OF TRAFFIC WHEN INSTALLING, RELOCATING OR DELIVERING PRECAST CONCRETE MEDIAN BARRIER.

(TC-2) QUANTITY INCLUDES SUFFICIENT LENGTH OF MEDIAN BARRIER TO PROVIDE FOR THE LONGEST SECTION SHOWN ON THE PLANS. THIS SAME BARRIER WILL BE USED ON OTHER DETOUR PHASES.

(TC-26) ALL CONSTRUCTION TRAFFIC CONTROL WILL BE IMPLEMENTED ACCORDING TO CONSTRUCTION PLANS AND INSTALLED IN A MANNER APPROVED BY THE ENGINEER, IN ACCORDANCE WITH CHAPTER VI OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, (CURRENT EDITION), AND COMPLIANT WITH APPLICABLE O.D.O.T. STANDARD DRAWINGS. PRICE BID FOR THIS ITEM SHALL BE PAYMENT IN FULL FOR THE INSTALLATION, MAINTENANCE AND SUBSEQUENT REMOVAL OF ALL NECESSARY CONSTRUCTION TRAFFIC CONTROL DEVICES REQUIRED FOR COMPLETION OF THE PROJECT.

(TC-30) ALL SIGNS AND BARRICADES WHICH ARE SHOWN WITH TYPE 'A' LIGHTS IN THE STANDARD DRAWINGS SHALL HAVE THE CORRESPONDING LIGHT ATTACHED DURING NON-DAYLIGHT HOURS.

(TC-33) INCLUDED IN THIS ITEM ARE ALL S.C.S. (SPECIAL CONSTRUCTION SIGNING) SIGNS WHICH ARE BETWEEN 16.00 S.F. AND 32.99 S.F. ALSO INCLUDED IN THIS ITEM SHALL BE THE COST OF INSTALLATION, MAINTENANCE, AND REMOVAL OF THESE SIGNS. ALL CONSTRUCTION WORK ZONE SIGNS SHALL HAVE FLOURESCENT SHEETING. THE FLOURESCENT SHEETING SHALL MEET THE REQUIREMENTS OF ASTM D4956 (LATEST REVISION). THE MANUFACTURER SHALL FURNISH A TYPE 'D' CERTIFICATION IN ACCORDANCE WITH O.D.O.T. STANDARD SPECIFICATIONS (CURRENT EDITION) SUBSECTION 106.04. THE CERTIFICATION SHALL INCLUDE TEST RESULTS ON MATERIAL SUBMITTED FOR APPROVAL.

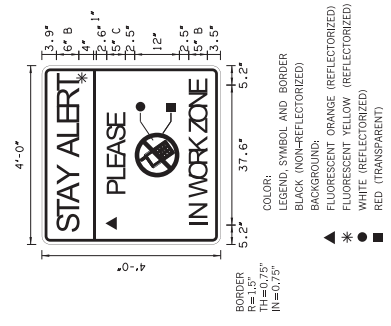

PREPARED BY:  
OKLAHOMA DEPARTMENT OF TRANSPORTATION  
TRAFFIC ENGINEERING DIVISION

*Jami L. Short*  
DATE: 09/07/2016

OKLA. REG. NO. 22542

SUMMARY OF PAY QUANTITIES & NOTES (TRAFFIC)

Drawn	RGN	11-16
Design	RGN	11-16
Checked	SEB	11-16
TRAFFIC ENGINEERING JAMI SHORT		