


SUMMARY OF DRIVES												
STATION AND LOCATION	WIDTH x LENGTH	TYPE	RADII (R1)	RADII (R2)	* 4" TBSQC TYPE E 402(E)	TACK COAT 407(B)	* SUPERPAVE TYPE S3 (PG 64-22 OK) 411(B)		* SUPERPAVE TYPE S4 (PG 64-22 OK) 411(C)		CONC. CURB (6" BARRIER-INTEGRAL) 609(A)	
							TON	GAL.	TON	TON	L.F.	L.F.
S.H. 74												
STA. 1051+90.00 - LT.	40.00' x 30.00'	ST. RETURN Δ	30'	30'	85.32							
STA. 1058+66.00 - LT.	12.00' x 109.61'	SP. RURAL	25'	25'	112.63	74.39	70.19	27.26				
STA. 1060+49.00 - RT.	12.00' x 173.00'	SP. RURAL	25'	25'	111.99	101.09	96.10	36.86				
STA. 1073+05.00 - LT.	12.00' x 142.99'	SP. RURAL	25'	25'	188.14	88.39	83.97	32.29				
STA. 1079+35.00 - RT.	26.00' x 140.00'	ST. RETURN Δ	25'	25'	253.73							
STA. 1088+96.00 - RT.	26.00' x 113.26'	RURAL	25'	25'	348.02	108.98	102.90	40.16				
STA. 1092+88.00 - LT.	12.00' x 131.30'	SP. RURAL	25'	25'	83.83	83.56	79.37	30.56				
STA. 1101+47.00 - LT.	36.00' x 94.98'	2	25'	25'	182.38	124.49	117.21	46.08				
STA. 1103+52.00 - LT.	28.00' x 98.91'	2	25'	25'	147.83					226.96		354.18
STA. 1106+86.00 - RT.	12.00' x 89.34'	SP. RURAL	25'	25'	153.58	65.85	62.43	24.19				
STA. 1122+71.00 - LT.	24.00' x 100.80'	2	25'	25'	127.99					230.14		315.58
STA. 1126+98.00 - LT.	24.00' x 118.02'	2	25'	25'	151.02					264.54		364.00
STA. 1152+56.00 - RT.	35.00' x 128.05'	RURAL	15'	15'	517.01	154.80	145.76	57.19				
STA. 1152+56.00 - LT.	24.00' x 86.89'	2	25'	25'	111.35					202.32		276.43
STA. 1169+40.00 - LT.	12.00' x 89.05'	SP. RURAL	25'	25'	56.95	65.68	62.26	24.12				
STA. 1175+96.00 - RT.	32.00' x 76.70'	SP. RURAL	25'	25'	402.73	111.41	104.83	41.33				
STA. 1177+00.00 - RT.	20.00' x 80.49'	RURAL	15'	15'	255.97	58.25	55.19	21.37				
STA. 1184+84.00 - LT.	96.00' x 173.00'	2A	50'	50'	479.74					692.35		1,412.96
STA. 1192+00.00 - RT.	20.00' x 113.01'	RURAL	15'	15'	292.24	40.32	76.39	29.54				
N.W. 178th STREET												
STA. 1014+49.00 - LT.	28.00' x 52.09'	2	25'	25'	109.00					165.50		196.46
STA. 1016+00.00 - LT.	28.00' x 48.59'	2	25'	25'	104.52					127.04		186.62
STA. 1018+36.00 - LT.	28.00' x 47.33'	2	25'	25'	100.04					124.54		182.51
N.W. 192nd STREET												
STA. 1008+16.00 - LT.	35.00' x 49.00'	2	15'	15'	117.59						209.74	
STA. 1009+54.00 - RT.	30.00' x 54.00'	2	15'	15'	103.99	26.67	50.27	19.61				12.68
STA. 1015+20.00 - LT.	35.00' x 92.33'	2	15'	15'	199.71	108.13	101.79	39.85			14.08	
STA. 1016+23.00 - LT.	35.00' x 92.33'	2	15'	15'	199.71	108.14	101.79	39.85			14.07	
STA. 1020+00.00 - LT.	35.00' x 73.33'	2	15'	15'	153.05	85.60	80.58	31.54			13.19	
STA. 1021+00.00 - LT.	35.00' x 63.69'	2	15'	15'	125.05	74.11	69.76	27.31			14.07	
STA. 1021+00.00 - RT.	20.00' x 59.15'	2	15'	15'	78.93	40.40	38.25	14.74			9.90	
STA. 1021+75.00 - LT.	35.00' x 58.65'	2	15'	15'	113.86	68.13	51.30	25.10			14.07	
STA. 1023+08.00 - LT.	35.00' x 48.48'	2	15'	15'	95.19	56.04	52.76	20.65			14.07	
N.W. 206th STREET												
STA. 1006+37.00 - RT.	37.00' x 54.71'	ST. RETURN	40'	40'	108.52					154.98		321.08
STA. 1011+05.00 - LT.	12.00' x 69.52'	SP. RURAL	25'	25'	63.99	58.35	55.24	21.30				
STA. 1011+41.00 - RT.	40.00' x 53.76'	RURAL	25'	25'	207.98	78.33	73.66	28.91			19.78	
STA. 1017+87.00 - RT.	30.00' x 46.43'	2	15'	15'	73.59				106.03		178.18	
STA. 1019+21.00 - RT.	16.00' x 47.00'	SP. RURAL	25'	25'	40.10	46.39	43.87	16.96				
STA. 1019+89.00 - RT.	25.00' x 47.35'	2	15'	15'	73.59						142.40	
TOTALS					6,130.87	1,827.50	1,775.87	696.77	523.11	1,771.29	643.55	3,622.50

* TBSQC QUANTITIES ARE FOR TEMPORARY DRIVES WITH TWO APPLICATIONS.
 Δ QUANTITY INCLUDED IN MAINLINE SURFACING QUANTITIES.
 ✱ QUANTITIES INCLUDE 2" OF SUPERPAVE TYPE S4 (PG64-22 OK), AND 5" OF SUPERPAVE TYPE S3 (PG 64-22 OK).

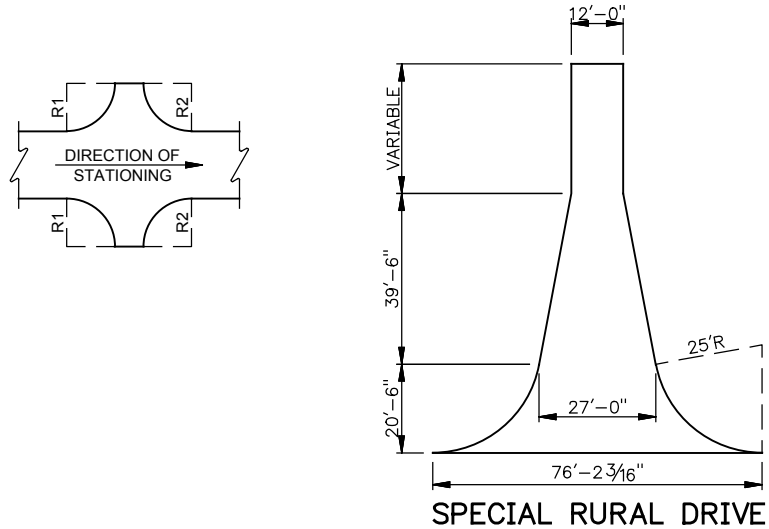

SUMMARY OF MAILBOX				
STATION AND LOCATION	TYPE	MAILBOX INSTALLATION - SINGLE 629(A)	REMOVE AND RESET MAILBOX 629(E)	
			EA.	EA.
S.H.74				
STA. 1168+61.89 - LT.				1
STA. 1021+31.15 - LT. ✱	1-A	1		
STA. 1016+30.65 - RT.				1
TOTALS		1		2

✱ REMOVAL OF BRICK MAILBOX TO BE INCLUDED IN REMOVAL STRUCTURES AND OBSTRUCTIONS.

SUMMARY OF EROSION CONTROL				
STATION EXTENTS	LOCATION AND DESCRIPTION	SOLID SLAB SODDING 230(A)	TYPE 1-A PLAN RIPRAP 601(B)	TYPE 1-A FILTER BLANKET 601(C)
		S.Y.	TON	TON
S.H. 74				
STA. 1052+45.56 TO STA. 1063+00.00	LT ,RT & MEDIAN OF RDY.	33,576		
STA. 1063+00.00 TO STA. 1078+00.00	LT ,RT & MEDIAN OF RDY. ,OUTLET OF BRIDGE D	42,997	298.50	94.82
STA. 1078+00.00 TO STA. 1093+00.00	LT ,RT & MEDIAN OF RDY. ,OUTLET OF STR. NO. 6	34,126	110.29	35.03
STA. 1093+00.00 TO STA. 1108+00.00	LT ,RT & MEDIAN OF RDY. ,OUTLET OF STR. NO. 25	29,249	50.10	15.92
STA. 1108+00.00 TO STA. 1123+00.00	LT ,RT & MEDIAN OF RDY.	36,684		
STA. 1123+00.00 TO STA. 1138+00.00	LT ,RT & MEDIAN OF RDY.	32,449		
STA. 1138+00.00 TO STA. 1153+00.00	LT ,RT & MEDIAN OF RDY. ,OUTLET OF STR. NO. 32	35,950	116.25	36.93
STA. 1153+00.00 TO STA. 1168+00.00	LT ,RT & MEDIAN OF RDY.	33,014		
STA. 1168+00.00 TO STA. 1183+00.00	LT ,RT & MEDIAN OF RDY.	29,642		
STA. 1183+00.00 TO STA. 1198+00.00	LT ,RT & MEDIAN OF RDY.	30,642		
STA. 1198+00.00 TO STA. 1213+00.00	LT ,RT & MEDIAN OF RDY. ,OUTLET STR. NO. 58	35,678	42.96	13.65
STA. 1213+00.00 TO STA. E.O.P.	LT ,RT & MEDIAN OF RDY.	2,158		
N.W. 178th STREET				
STA. 1009+00.00 TO STA. 1024+00.00	LT & RT OF RDY. ,OUTLET STR. NO. 14	9,854	54.72	17.38
STA. 1024+00.00 TO STA. 1033+37.08	LT & RT OF RDY.	13,624		
N.W. 192nd STREET				
STA. 1004+09.63 TO STA. 1014+00.00	LT & RT OF RDY.	6,125		
STA. 1014+00.00 TO STA. 1024+50.00	LT & RT OF RDY.	7,783		
N.W. 206th STREET				
STA. 1003+50.00 TO STA. 1013+00.00	LT & RT OF RDY.	8,255		
STA. 1013+00.00 TO STA. 1023+65.04	LT & RT OF RDY.	8,189		
TOTALS		429,995	672.82	213.73

SUMMARY OF REMOVAL QUANTITIES									
STATION EXTENTS	REMOVAL OF CONCRETE PAVEMENT 619(B)	REMOVAL OF ASPHALT PAVEMENT 619(B)	REMOVAL OF CONCRETE DRIVEWAY 619(B)	REMOVAL OF CONCRETE DITCH LINER 619(B)	SAWING PAVEMENT 619(C)	REMOVAL OF FENCE 619(B)	REMOVAL OF 4" CONCRETE DIVIDING STRIP 619(B)	REMOVE AND RESET CATTLE GUARD 619(B)	REMOVAL OF CURB AND GUTTER 619(B)
	S.Y.	S.Y.	S.Y.	L.F.	L.F.	L.F.	S.Y.	EA.	L.F.
S.H. 74									
STA. 1048+15.00 TO STA. 1078+00.00		19,563.00		658.00	566.00	2,965.00		1.00	
STA. 1078+00.00 TO STA. 1108+00.00	47.00	12,736.00	406.00		73.00	2,878.00	377.00	2.00	322.00
STA. 1108+00.00 TO STA. 1138+00.00		8,414.00				228.00			
STA. 1138+00.00 TO STA. 1168+00.00		9,930.00				1,680.00			132.00
STA. 1168+00.00 TO STA. 1198+00.00	1,452.00	8,518.00			54.00	2,983.00			
STA. 1198+00.00 TO STA. 1213+75.00		7,714.00			42.00				
N.W. 178th STREET									
STA. 1010+62.66 TO STA. 1033+37.08	414.00	9,916.00			199.00	1,854.00			
N.W. 192nd STREET									
STA. 1004+09.63 TO STA. 1024+50.00		8,377.00			109.00	2,335.00			
N.W. 206th STREET									
STA. 1005+70.00 TO STA. 1023+65.04		7,602.00	606.00		157.00	1,204.00			1,953.00
DETOUR S.H. 74									
STA. 1072+00.00 TO STA. 1078+00.00		726.00							
STA. 1078+00.00 TO STA. 1090+21.88		3,815.00							
DETOUR N.W. 178th STREET									
STA. 1010+62.66 TO STA. 1020+70.13		2,260.00							
STA. 1021+16.13 TO STA. 1032+39.03		2,430.00							
TOTALS	1,913.00	102,001.00	1,012.00	658.00	1,200.00	16,127.00	377.00	3.00	2,407.00

SUMMARY SHEET