



PHASE 1B (REMOVAL OF SOUTH PORTION EXIST. 145TH E. AVE. BRIDGE, TO OCCUR OVER ONE WEEKEND
 CLOSE AND DETOUR 145TH FOR DURATION OF PROJECT.
 SHIFT EASTBOUND I-44 TRAFFIC TO WESTBOUND LANES.
 MAINTAIN ONE LANE OF TRAFFIC EACH DIRECTION.
 REMOVE SOUTHERN PORTION OF 145TH E. AVE. BRIDGE.
 TRAFFIC TO BE RESTORED TO NORMAL CONDITIONS PRIOR TO MONDAY MORNING.

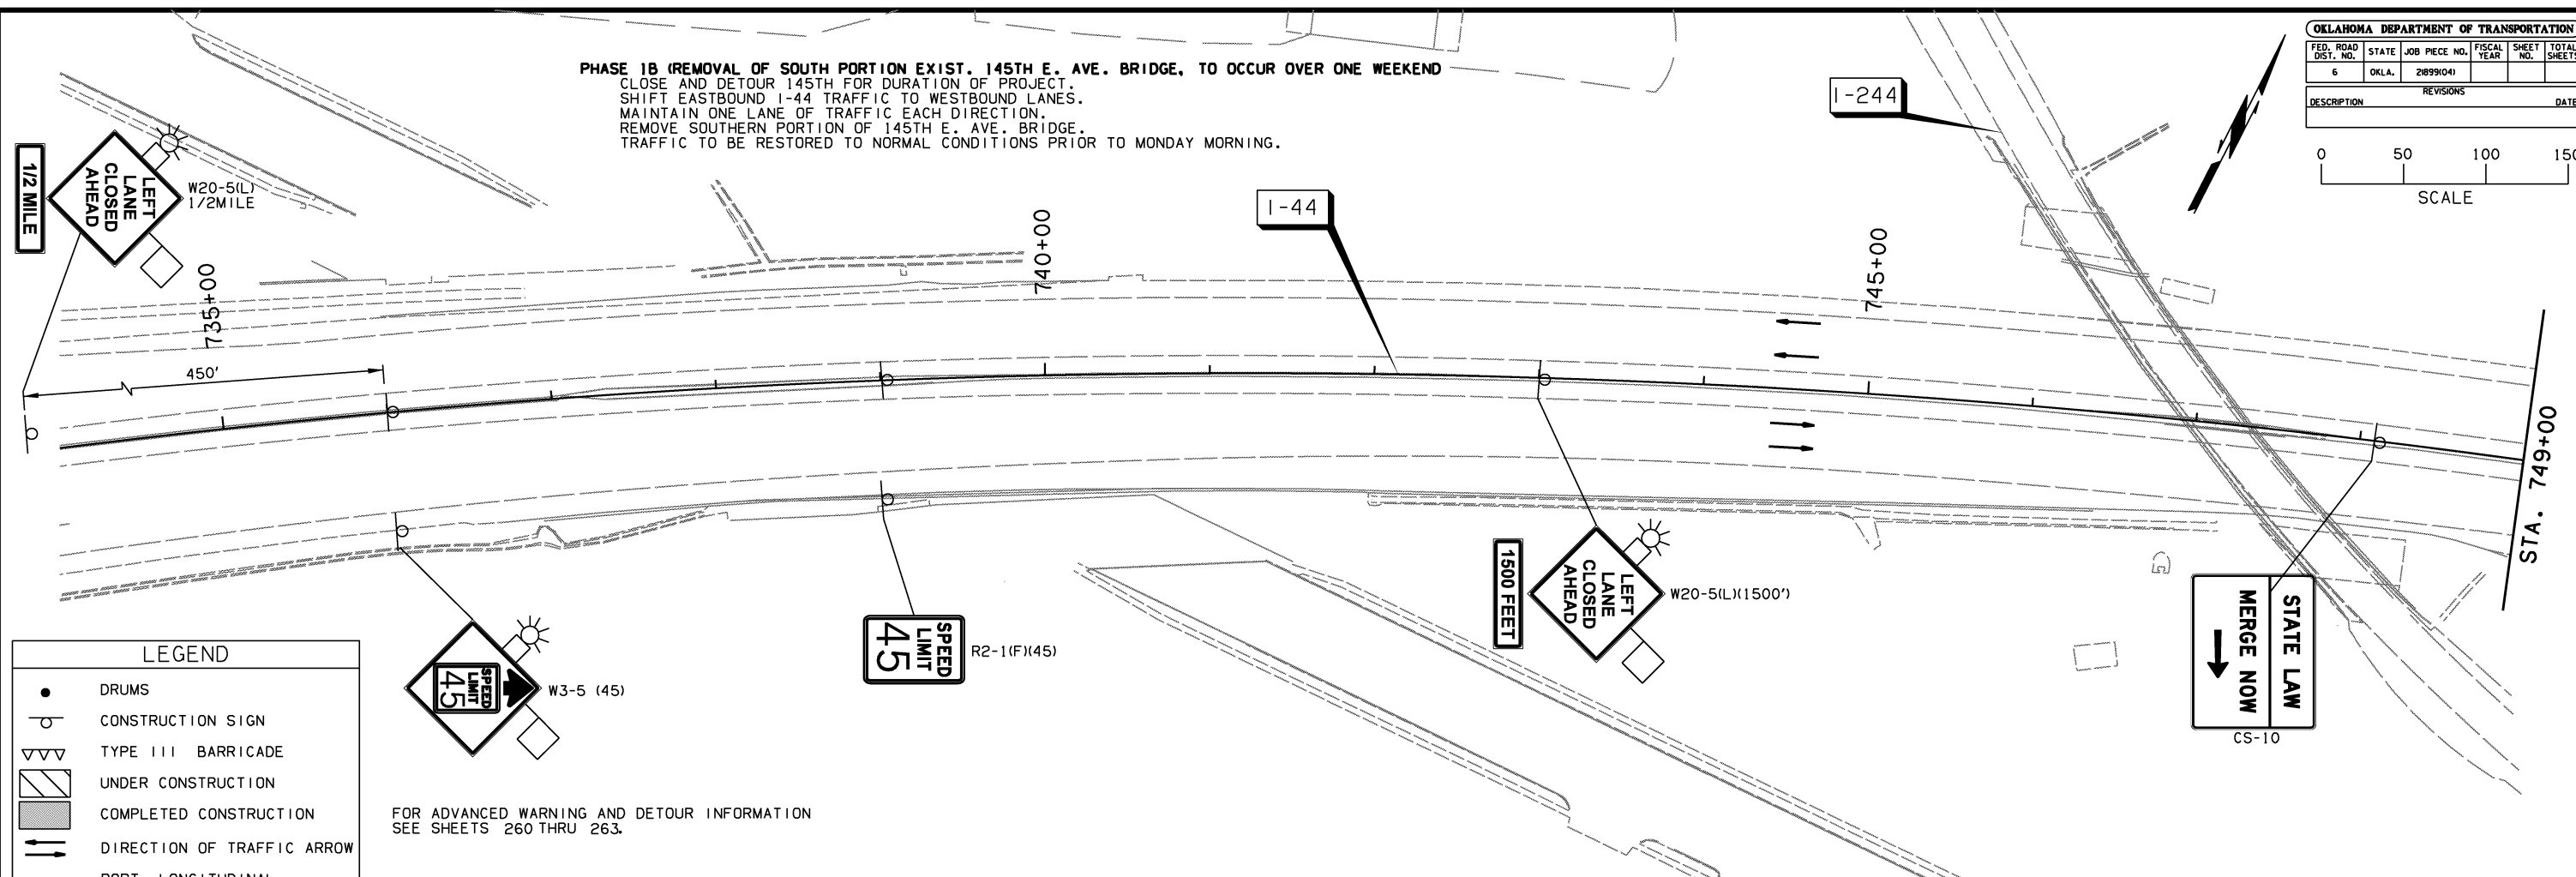

LEGEND	
•	DRUMS
⊙	CONSTRUCTION SIGN
▤	TYPE III BARRICADE
▨	UNDER CONSTRUCTION
▩	COMPLETED CONSTRUCTION
→	DIRECTION OF TRAFFIC ARROW
—	PORT. LONGITUDINAL BARRIER (P.L.B.)
— —	PORT. LONGITUDINAL BARRIER (P.L.B.) WITH GLARE SCREEN
⊠	TEMP. IMPACT ATTENUATOR
→	ARROW BOARD/PORTABLE MESSAGE SIGN
⊙	VERTICAL PANEL

FOR ADVANCED WARNING AND DETOUR INFORMATION SEE SHEETS 260 THRU 263.

LENGTH OF P.L.B. DIMENSIONED PER CONTINUOUS PLACEMENT

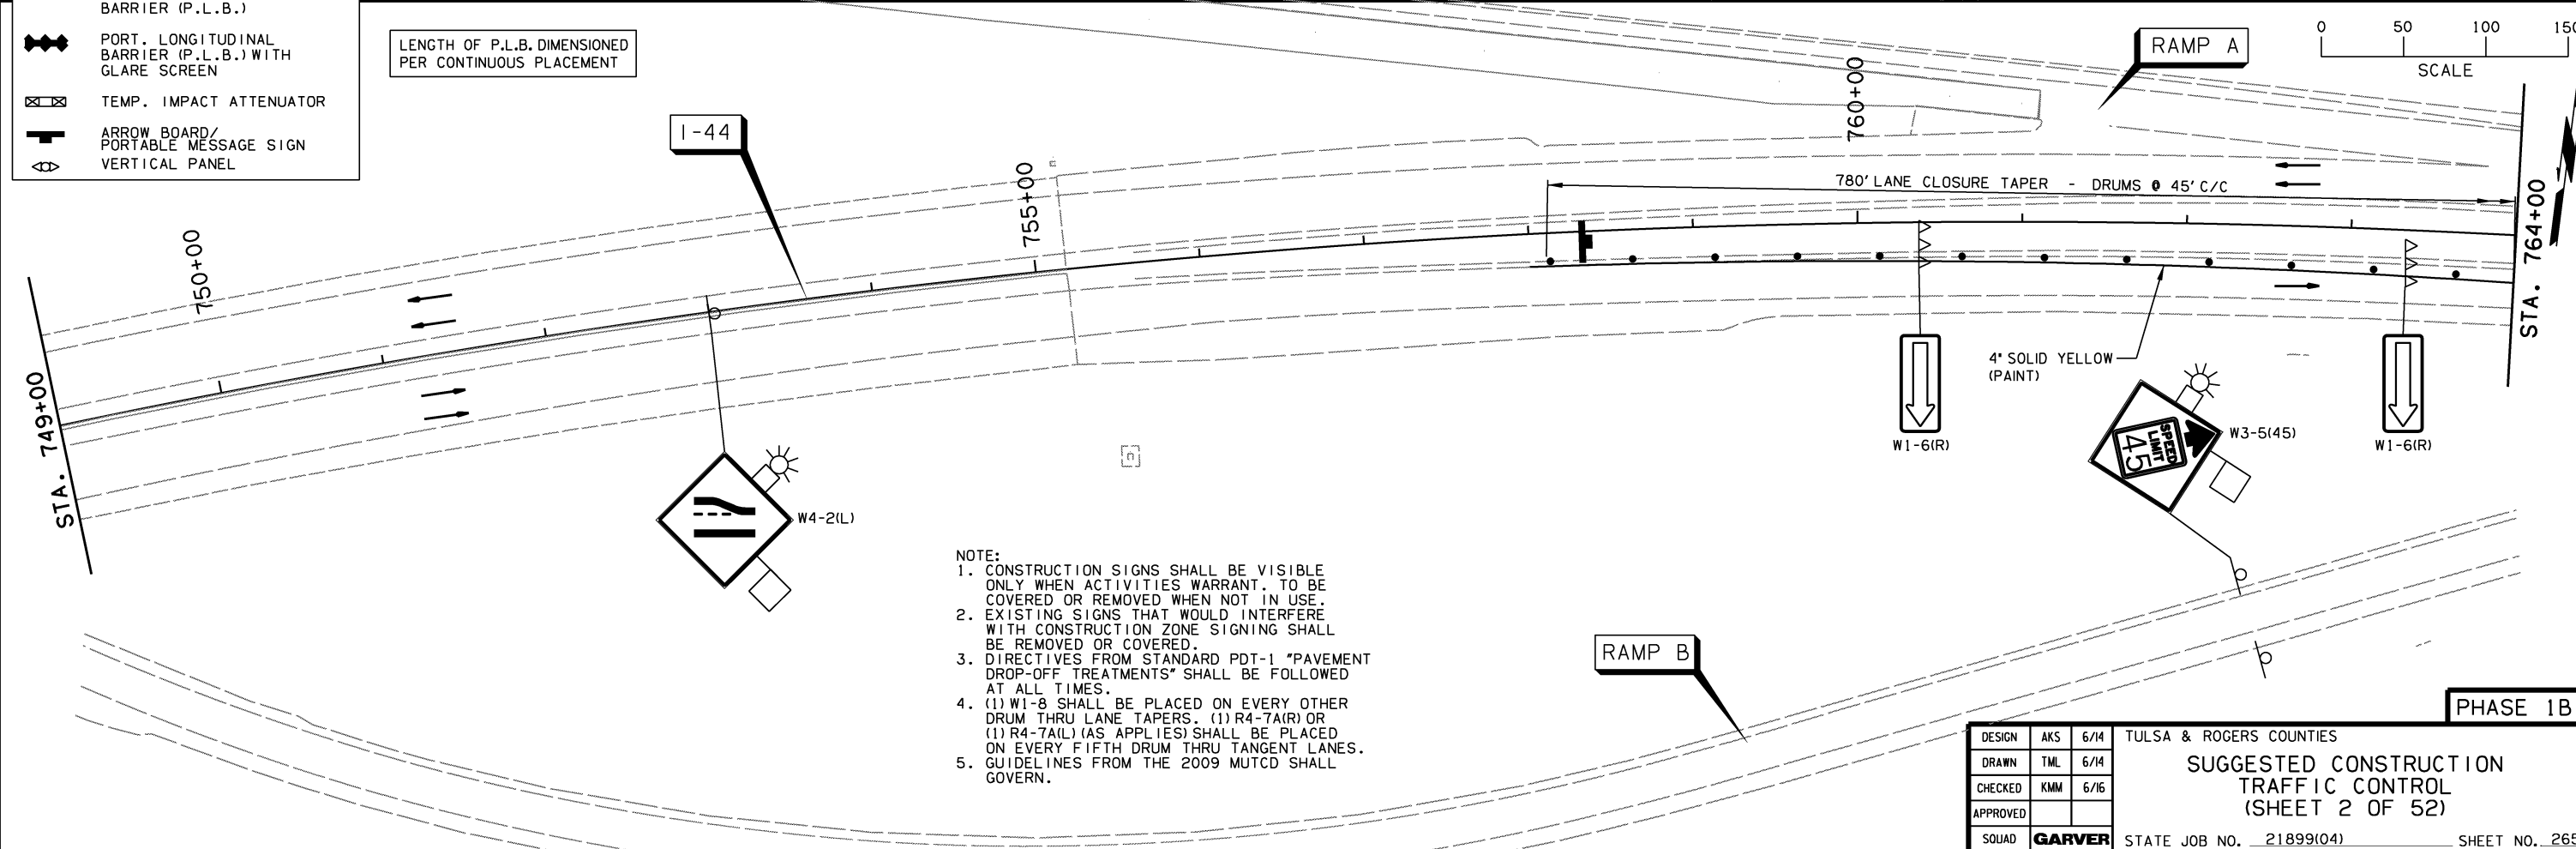

- NOTE:
- CONSTRUCTION SIGNS SHALL BE VISIBLE ONLY WHEN ACTIVITIES WARRANT. TO BE COVERED OR REMOVED WHEN NOT IN USE.
 - EXISTING SIGNS THAT WOULD INTERFERE WITH CONSTRUCTION ZONE SIGNING SHALL BE REMOVED OR COVERED.
 - DIRECTIVES FROM STANDARD PDT-1 "PAVEMENT DROP-OFF TREATMENTS" SHALL BE FOLLOWED AT ALL TIMES.
 - (1) W1-8 SHALL BE PLACED ON EVERY OTHER DRUM THRU LANE TAPERS. (1) R4-7A(R) OR (1) R4-7A(L) (AS APPLIES) SHALL BE PLACED ON EVERY FIFTH DRUM THRU TANGENT LANES.
 - GUIDELINES FROM THE 2009 MUTCD SHALL GOVERN.

DESIGN	AKS	6/14	TULSA & ROGERS COUNTIES
DRAWN	TML	6/14	SUGGESTED CONSTRUCTION TRAFFIC CONTROL (SHEET 2 OF 52)
CHECKED	KMM	6/16	
APPROVED			
SQUAD	GARVER		STATE JOB NO. 21899(04) SHEET NO. 265