



SUGGESTED SEQUENCE OF CONSTRUCTION

PHASE 5

1. THE CONTRACTOR SHALL OPEN TEXANNA ROAD, EW-114 AND NS-426 TO 2-WAY TRAFFIC.
2. THE CONTRACTOR SHALL REMOVE EXISTING PAVEMENT ALONG THE EXISTING ALIGNMENT AS SHOWN.

REV. NO.	DESCRIPTION	DATE
1	ADDED QUANTITIES	10/06/17

LEGEND	
	CURRENT WORK ZONE
	TEMP. PAVEMENT REMOVAL
	COMPLETED CONSTRUCTION
	CHANNELIZING DEVICE
	3-TYPE III BARRICADES
	CONCRETE MEDIAN BARRIER
	PORTABLE TRAFFIC SIGNAL

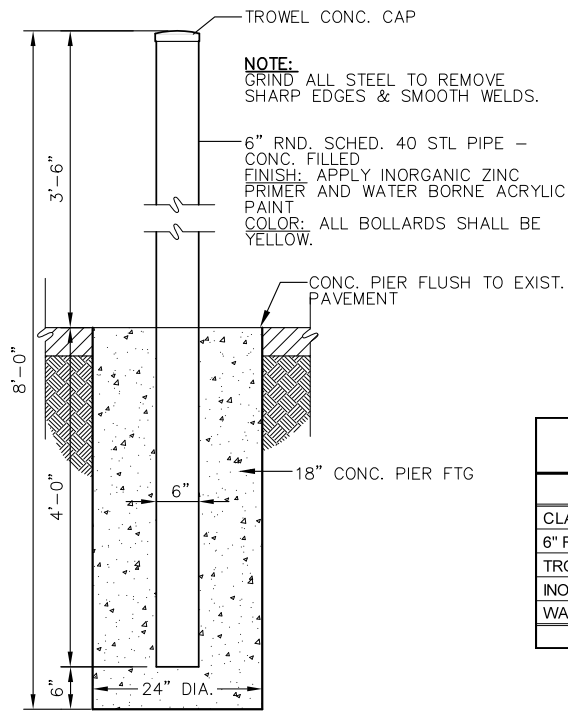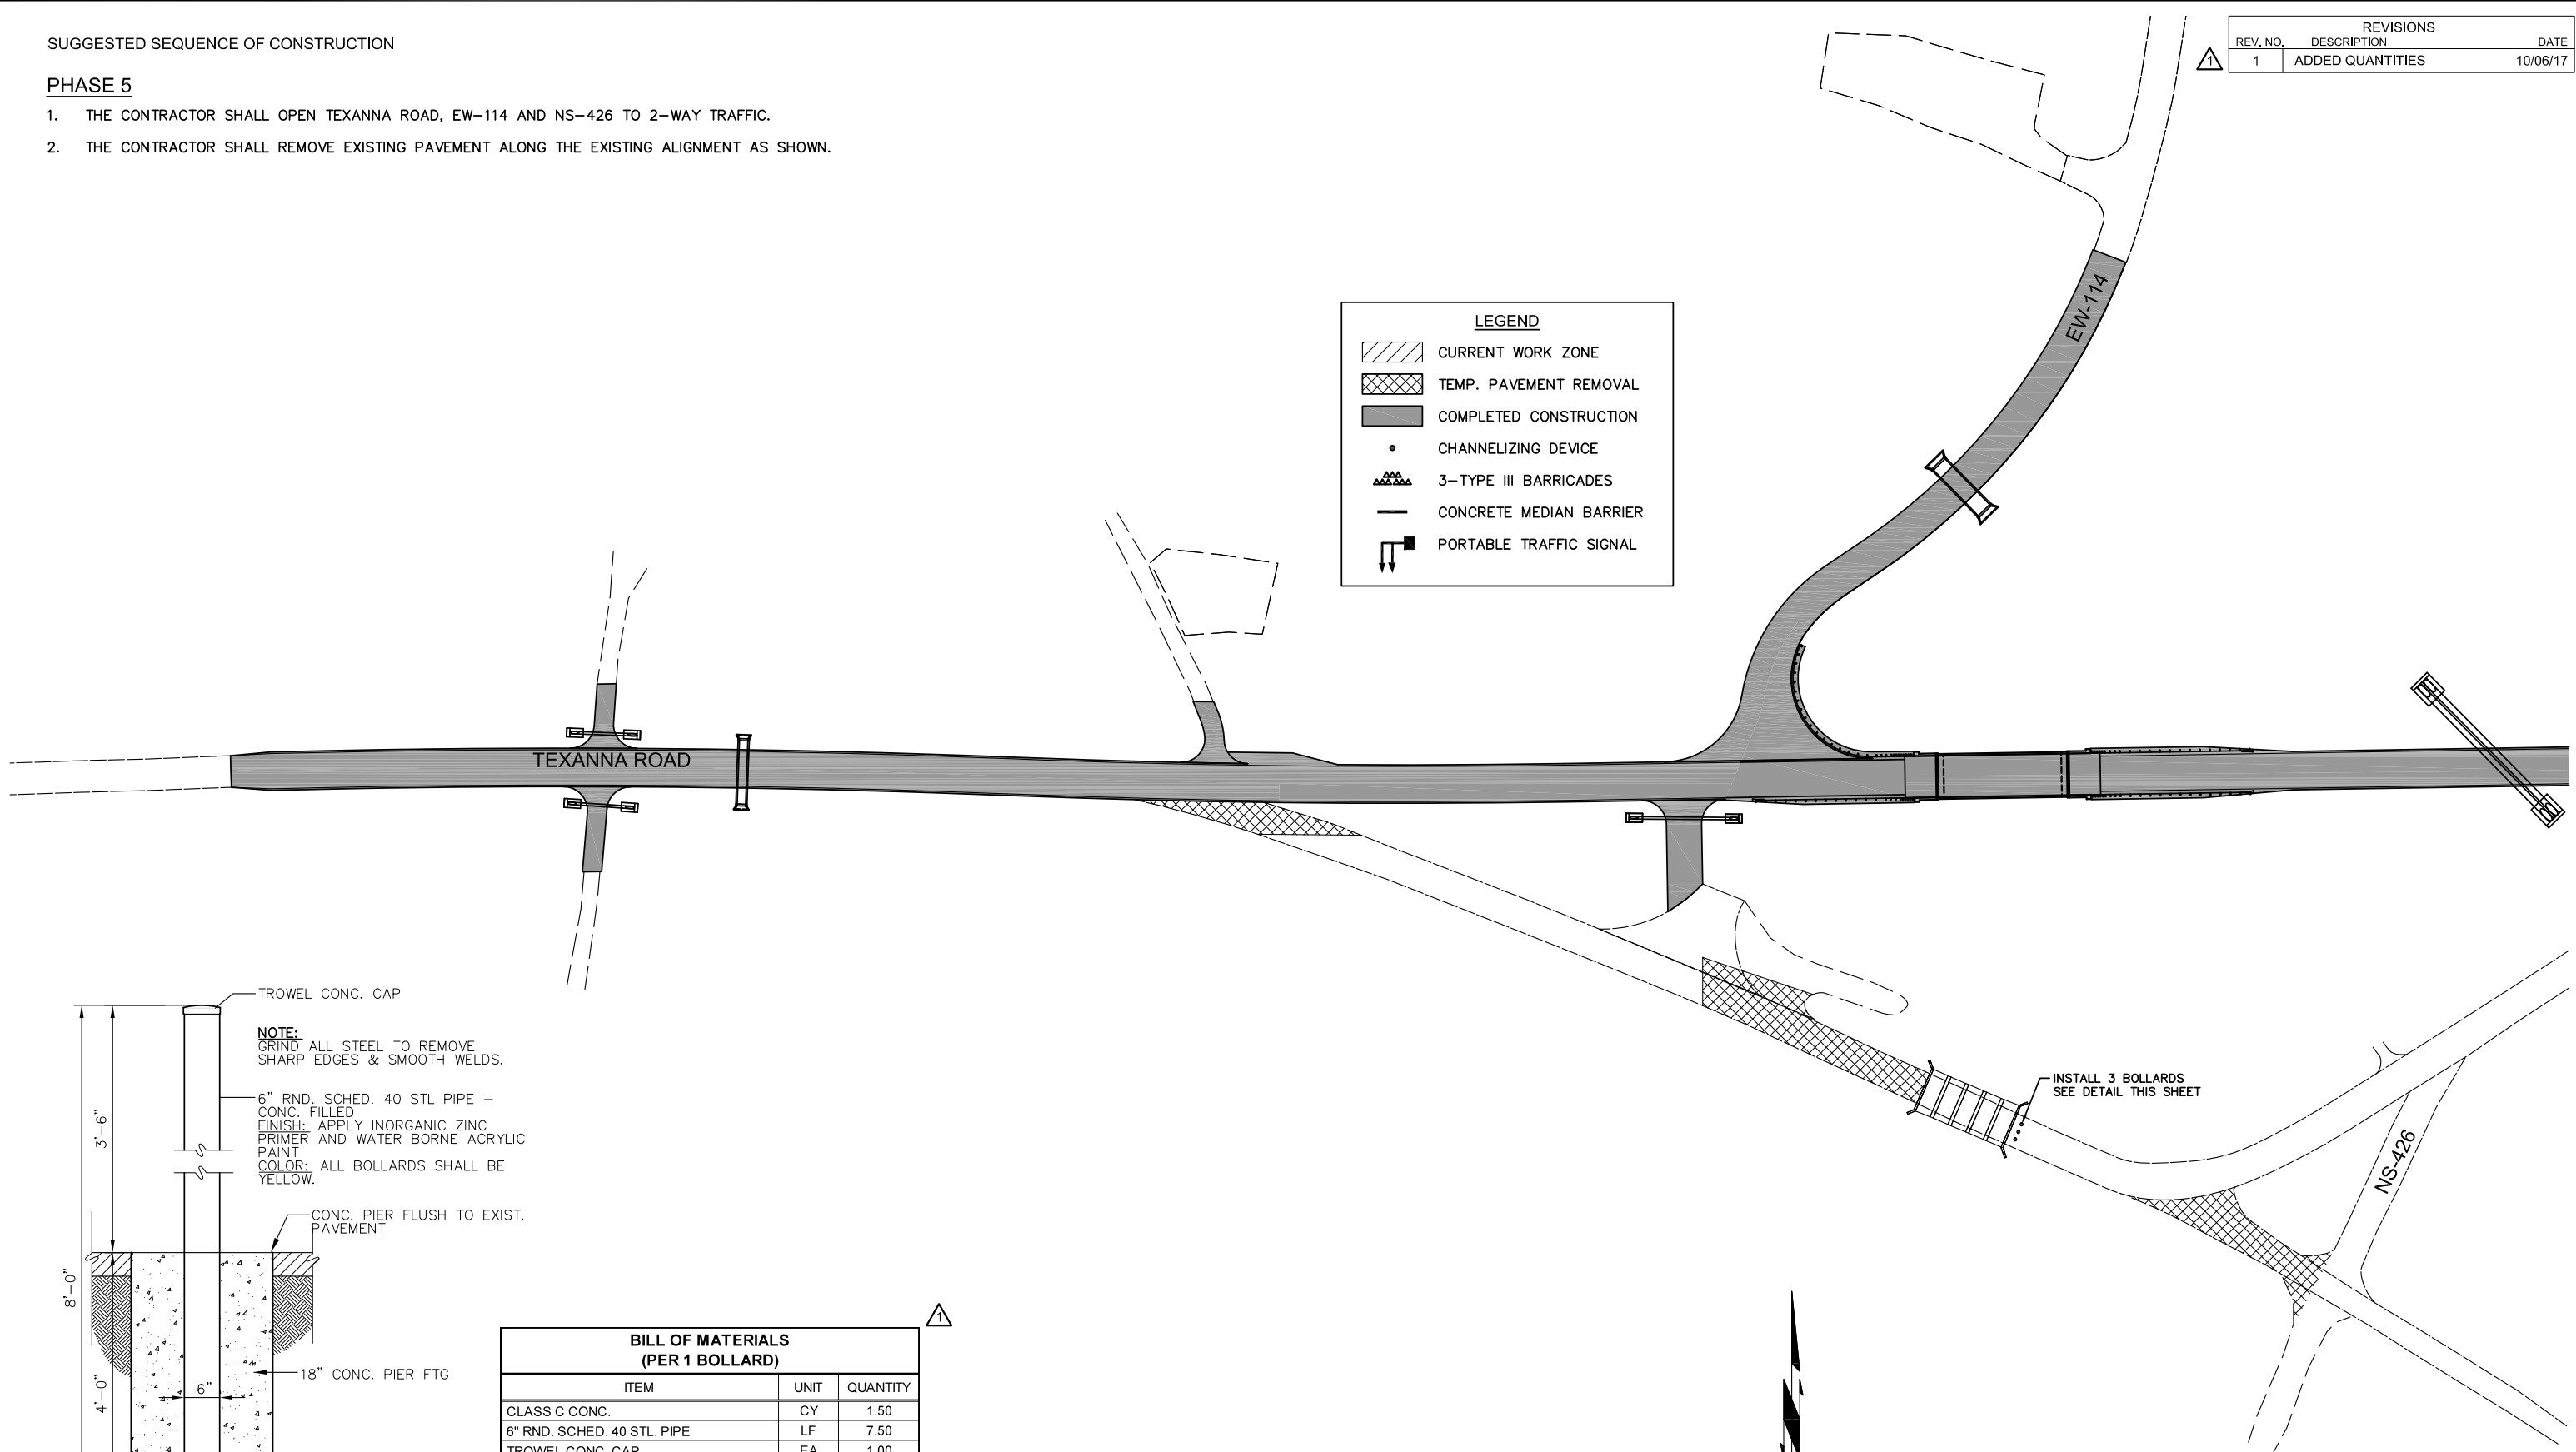

**NOTE:**  
GRIND ALL STEEL TO REMOVE SHARP EDGES & SMOOTH WELDS.  
6" RND. SCHED. 40 STL PIPE - CONC. FILLED  
FINISH: APPLY INORGANIC ZINC PRIMER AND WATER BORNE ACRYLIC PAINT  
COLOR: ALL BOLLARDS SHALL BE YELLOW.

BILL OF MATERIALS (PER 1 BOLLARD)		
ITEM	UNIT	QUANTITY
CLASS C CONC.	CY	1.50
6" RND. SCHED. 40 STL. PIPE	LF	7.50
TROWEL CONC. CAP	EA	1.00
INORGANIC ZINC PRIMER	SF	12.00
WATER BORNE ACRYLIC PAINT (YELLOW)	SF	12.00

DESIGN	GCS		EW115 TEXANNA CREEK	MCINTOSH CO.
DRAWN	GLH		OKLAHOMA DEPARTMENT OF TRANSPORTATION	
CHECKED	GCS			
APPROVED			CONSTRUCTION SEQUENCING PHASE 5 (SHEET 1 OF 1)	
SQUAD	KCS		STATE JOB NO. 29374(04)	SHEET NO. T009

N:\AF34-CE2-1 - MCINTOSH-BR062\DRAWINGS\AF34-SEQUENCING.DWG 10/6/2017