REVISIONS		
DESCRIPTION		DATE
ADD BASIS OF PAYMENT		01/12/05

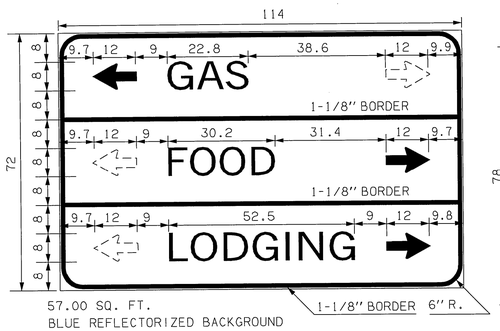

57.00 SQ. FT.
BLUE REFLECTORIZED BACKGROUND

11-25

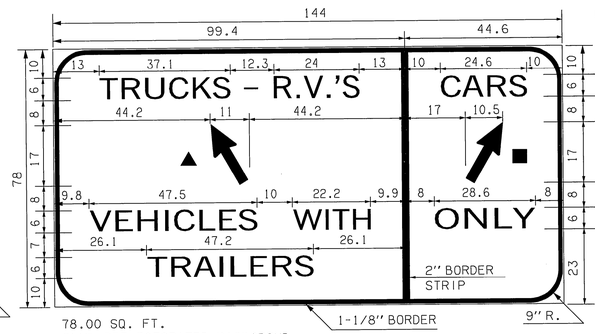

78.00 SQ. FT.
BLUE REFLECTORIZED BACKGROUND

11-27

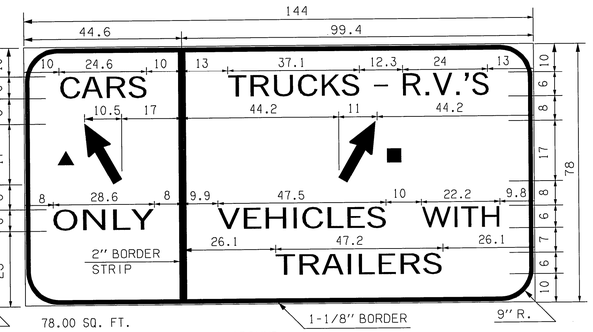

78.00 SQ. FT.
BLUE REFLECTORIZED BACKGROUND

11-28

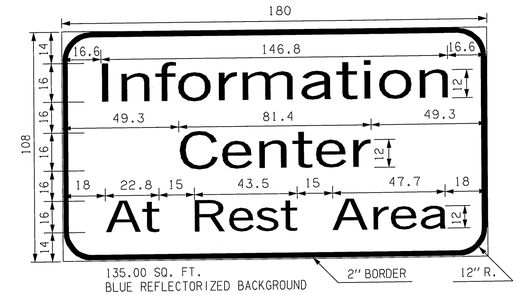

135.00 SQ. FT.
BLUE REFLECTORIZED BACKGROUND

11-26

* DIMENSIONS VARY WITH THE NUMBER OF MILES AND SHOULD BE ADJUSTED TO BALANCE THE SPACE FROM THE BEGINNING AND END OF THE MESSAGE TO THE EDGE OF THE SIGN.

■ RIGHT ARROW: 8" X 18" AT 80°

▲ LEFT ARROW: 8" X 18" AT 60°

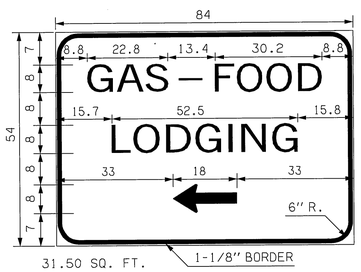

31.50 SQ. FT.
BLUE REFLECTORIZED BACKGROUND

11-25A



63.75 SQ. FT.
GREEN REFLECTORIZED BACKGROUND

T-3



DETAIL "A"

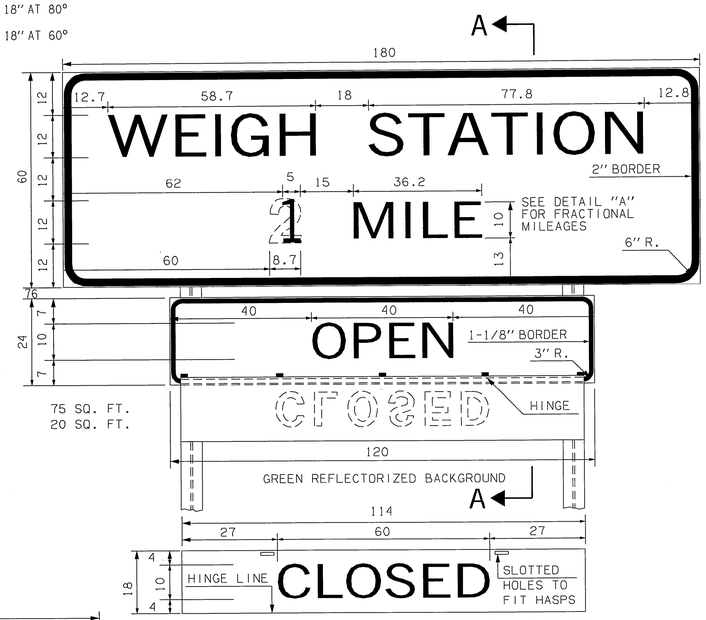

75 SQ. FT.
20 SQ. FT.

THIS SIGN TO BE MADE FROM 0.100" THICK SHEET ALUMINUM ALLOY 6061-T6. 14.25 SQ. FT.

GREEN REFLECTORIZED BACKGROUND BOTH SIDES, TYPE "B" FOR MESSAGE

T-1



SECTION "A–A"

NOTES:

HINGES SHALL BE APPROXIMATELY 2" X 2" AND SHALL BE GALVANIZED.

HASPS SHALL ALSO BE GALVANIZED AND OF SUFFICIENT SIZE AS COMPARED TO THE HINGES.

BOTH HINGES AND HASPS ARE SUBJECT TO THE APPROVAL OF THE ENGINEER.

HINGES, HASPS AND 1/2" ALUMINUM BLOCKS SHALL BE COMPLETELY CLEANED, PRIMED, AND THEN PAINTED WITH TWO (2) COATS OF A HIGH GRADE INTERSTATE GREEN ENAMEL.

TWO (2) GOOD QUALITY HEAVY DUTY PAD-LOCKS, WITH TWO (2) KEYS FOR EACH LOCK, SHALL BE FURNISHED FOR EACH OF THIS TYPE SIGN REQUIRED.

HINGES AND HASPS SHALL BE BLOCKED OUT FROM SIGN FACE 1/2" BY USE OF ALUMINUM BLOCKS TO ALLOW CLEARANCE OF CUTOUT, REFLECTORIZED LETTERS.

ALL HINGES AND HASPS SHALL BE RIVETED TO SIGN WITH 3/16" MINIMUM DIAMETER COUNTER SUNK RIVETS.

ALL PANEL SIGNS SHALL USE TYPE "III" REFLECTORIZED SHEETING.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED OR SHOWN.



12 SQ. FT.
GREEN REFLECTORIZED BACKGROUND

11-17A

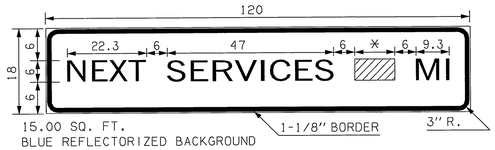

15.00 SQ. FT.
BLUE REFLECTORIZED BACKGROUND

11-20A



20.00 SQ. FT.
GREEN REFLECTORIZED BACKGROUND

11-17B



26.00 SQ. FT.
BLUE REFLECTORIZED BACKGROUND

11-20B

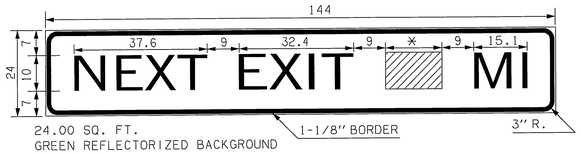

24.00 SQ. FT.
GREEN REFLECTORIZED BACKGROUND

11-17C



31.00 SQ. FT.
BLUE REFLECTORIZED BACKGROUND

11-20C

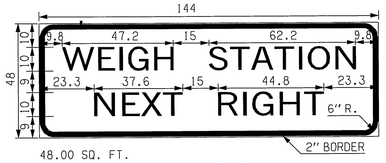

48.00 SQ. FT.
GREEN REFLECTORIZED BACKGROUND

T-2

BASIS OF PAYMENT

ITEM NO.	ITEM	UNIT
850(B)	EXTRUDED ALUMINUM PANEL SIGNS	SF

APPROVED BY TRAFFIC ENGINEER Harold Smith DATE 7/13/05

OKLAHOMA DEPT. OF TRANSPORTATION
TRAFFIC STANDARD (ENGLISH)
STANDARD INTERSTATE INFORMATIONAL SIGNS

1999 SPECIFICATIONS | SIS2-1 | 01E | T-46E

TRFFC38 U:\Traffic\Group2\STANDARDS_IN_REV\046e_SIS2-1-01E.dgn 10:52:43 AM 7/8/2005