


**STREET NAME SIGN INSERT DETAIL (WHERE REQUIRED)**

- NOTES:
- 1) TO BE USED FOR ALL STREET NAME SIGN INSTALLATIONS, WITH OR WITHOUT OTHER TRAFFIC SIGNS.
  - 2) STREET NAME SIGNS SHALL NOT BE ATTACHED DIRECTLY TO 1-3/4" POST.
  - 3) HAMMER-BEND ALL BOLTS AFTER INSTALLATION (EXCEPT FOOTING SLEEVE) TO PREVENT UNAUTHORIZED REMOVAL OF SIGNS AND INSERT.
  - 4) FOR SIGN LENGTHS 30" AND OVER, ENDS SHALL BE PINCHED-BOLTED USING \*10-24 x 1/2" PHILLIPS/SLOTTED PAN HEAD BOLT, NUT, AND 2 WASHERS.

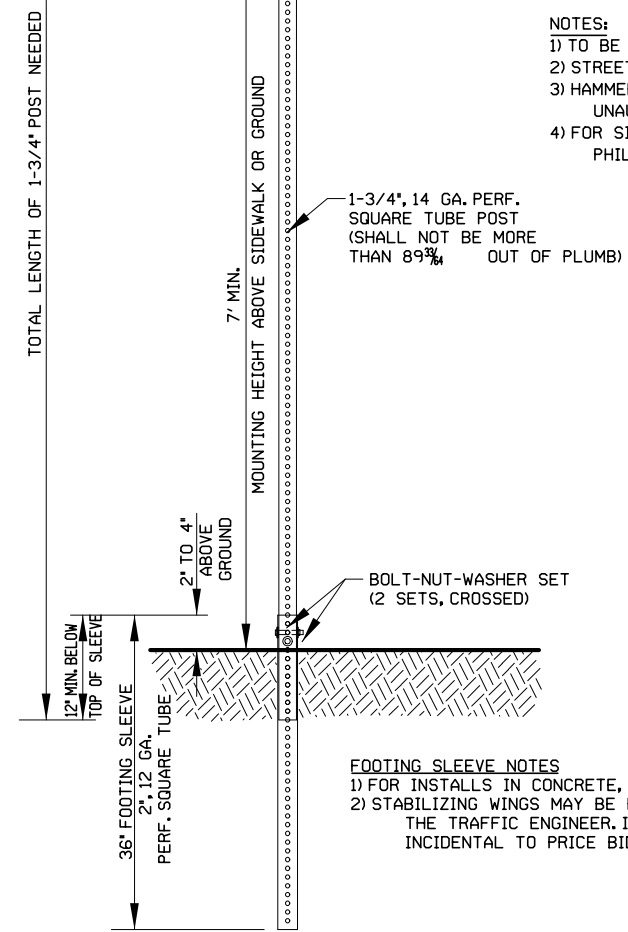


- FOOTING SLEEVE NOTES
- 1) FOR INSTALLS IN CONCRETE, USE 12" MIN. FOOTING SLEEVE.
  - 2) STABILIZING WINGS MAY BE REQUIRED, AS DETERMINED BY THE TRAFFIC ENGINEER. IF REQUIRED, COSTS SHALL BE INCIDENTAL TO PRICE BID FOR 2" SQUARE TUBE POST.

**SIGN INSTALLATION DETAIL**

PAY ITEM	DESCRIPTION	UNIT	USE FOR:
608(A)	GROUND SIGN	S.F.	POST-MOUNTED TRAFFIC / STREET NAME SIGNS
608(B)	OVERHEAD SIGN	S.F.	MAST-ARM MOUNTED SIGNS
608(C)	1-1/2" SIGN POST	L.F.	STREET NAME SIGN INSERT
608(D)	1-3/4" SIGN POST	L.F.	MAIN SIGN POST
608(E)	2" SIGN POST	L.F.	FOOTING SLEEVE

**SIGN PAY ITEM TABLE**

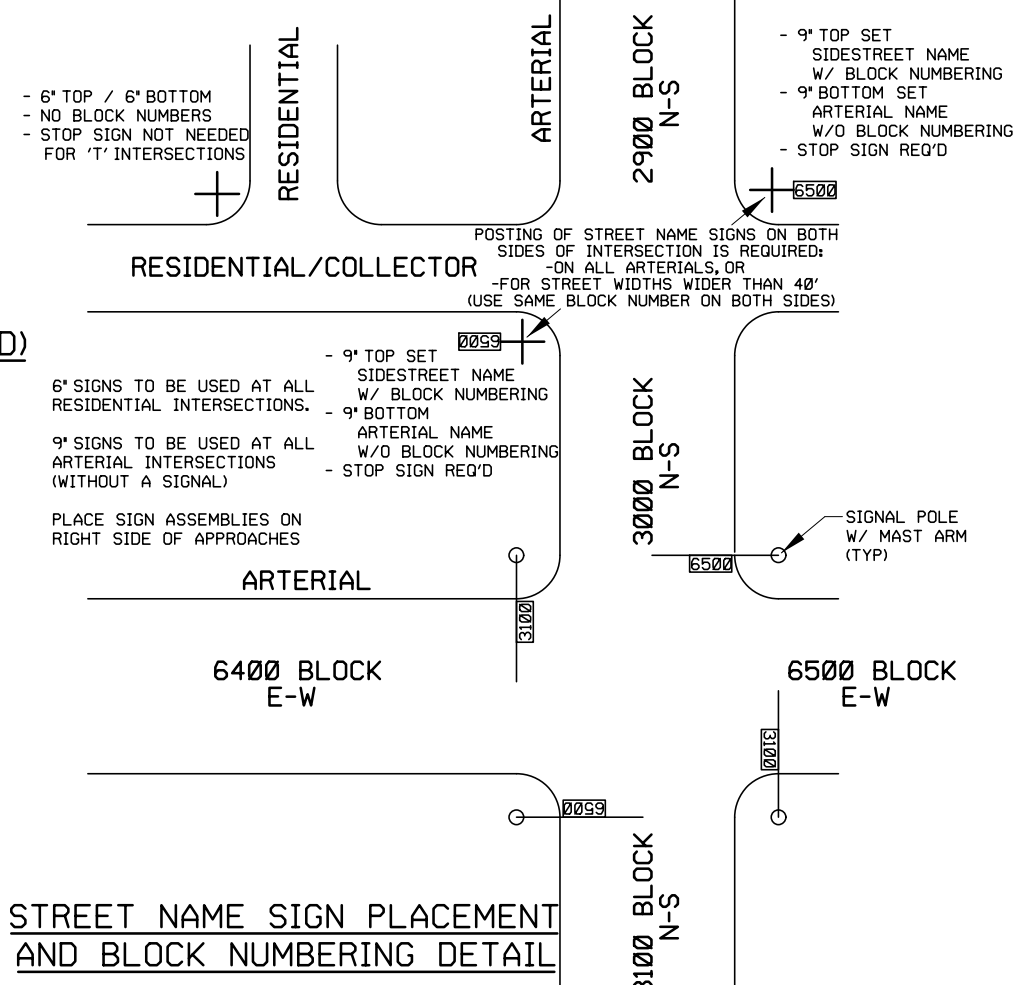

**STREET NAME SIGN PLACEMENT AND BLOCK NUMBERING DETAIL**

SHOWS TYPICAL INSTALLATIONS  
CONTRACTOR SHALL INSTALL BASED ON PLANS

BEFORE YOU DIG  
CALL OKIE  
811



**JACOBS**

10816 EXECUTIVE CENTER DR. STE. 300  
LITTLE ROCK, ARKANSAS 72211

OKLAHOMA DEPARTMENT OF TRANSPORTATION DESIGN DIVISION			
DESIGN	BLV		
DRAWN	JAB		
CHECKED	BLV		
APPROVED	BLV		
SQUAD	Jacobs		
TRAFFIC SIGNS		STD. 608B	
PROJECT NO. 23708(06)		SHEET NO. 49	